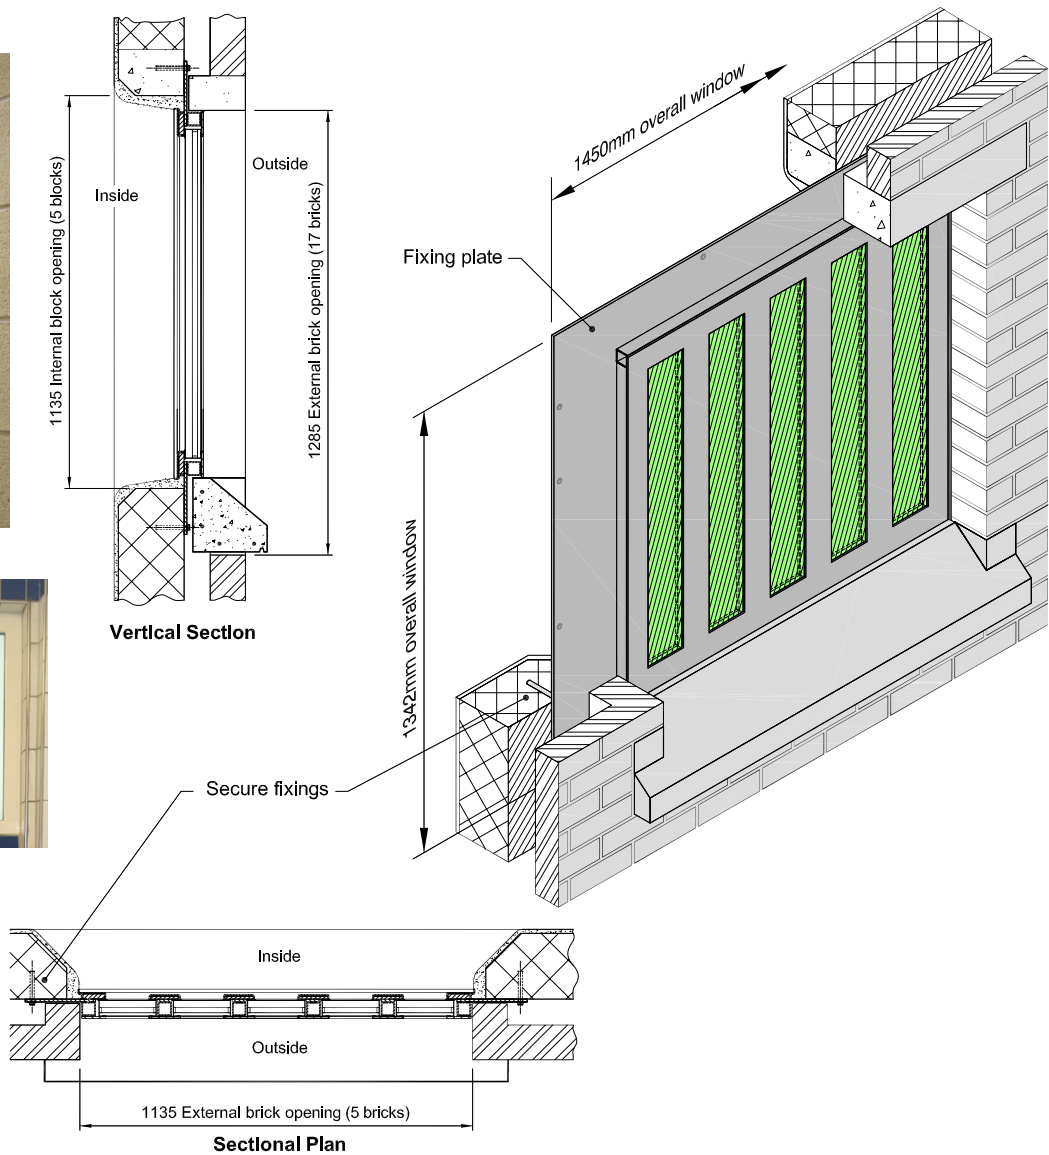
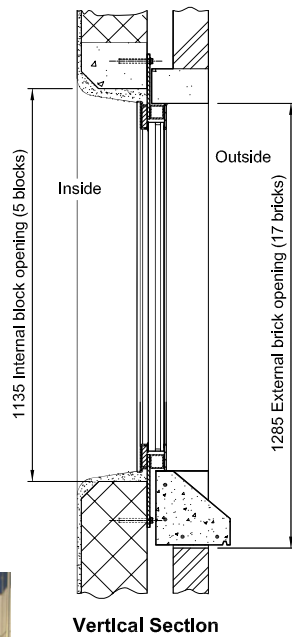



CSL0607

**Specification**


- Window designed jointly with the Home Office.
- Exceeds Home Office blast test requirements.
- Windows are constructed from Grade 316 stainless steel external plate fixed to an 8mm thick mild steel mounting plate from inside with no fixings on outside face.
- A double thermal break is provided between the internal and external faces.
- All glass panels are 45mm thick sealed double glazed units from toughened and obscured laminated glass.
- Fixings to suit a variety of opening constructions.

Finish

- Stainless steel external face bead blasted
- Mild steel parts to have one coat high build zinc phosphate primer.

Options

- Blast Resisting window maximum size is as indicated 1450mm wide x 1342mm high.
- Standard (non blast resisting) available any size.
- Fixing arrangement can be altered to suit site conditions only when blast resistance not required.
- Polyester powder coated available.



CSL0607