



CSL0128

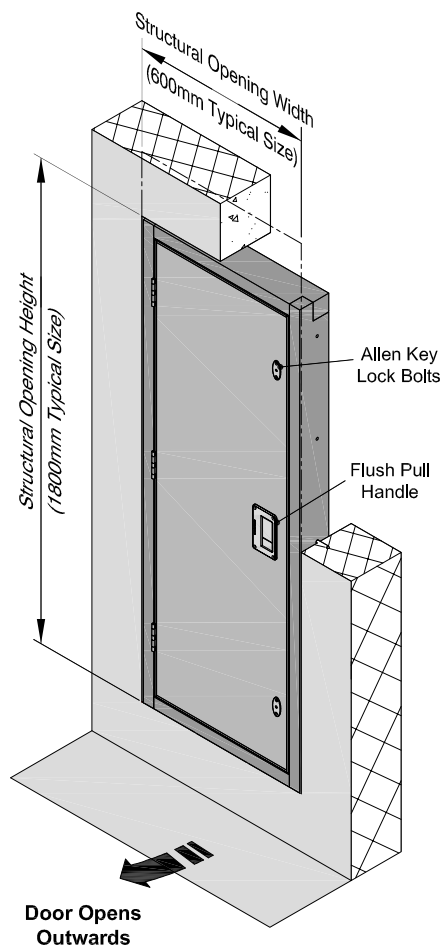

Specification

- Door is constructed from a 54mm thick solid timber core blank with hardwood lipping to all edges.
- Door is mounted within a hardwood profile frame and hung on 3No. x 100mm butt hinges.
- Frame fixings to suit a variety of opening construction.
- Recessed handle outside.
- Two allen key bolt locks.

Finish

- One coat factory applied high build zinc phosphate primer to all mild steel surfaces.

Options

- Veneer finish.
- Double door arrangement.
- Smoke seals.
- Continuous hinge in lieu of butt hinges.



CSL0130