


CSL0206

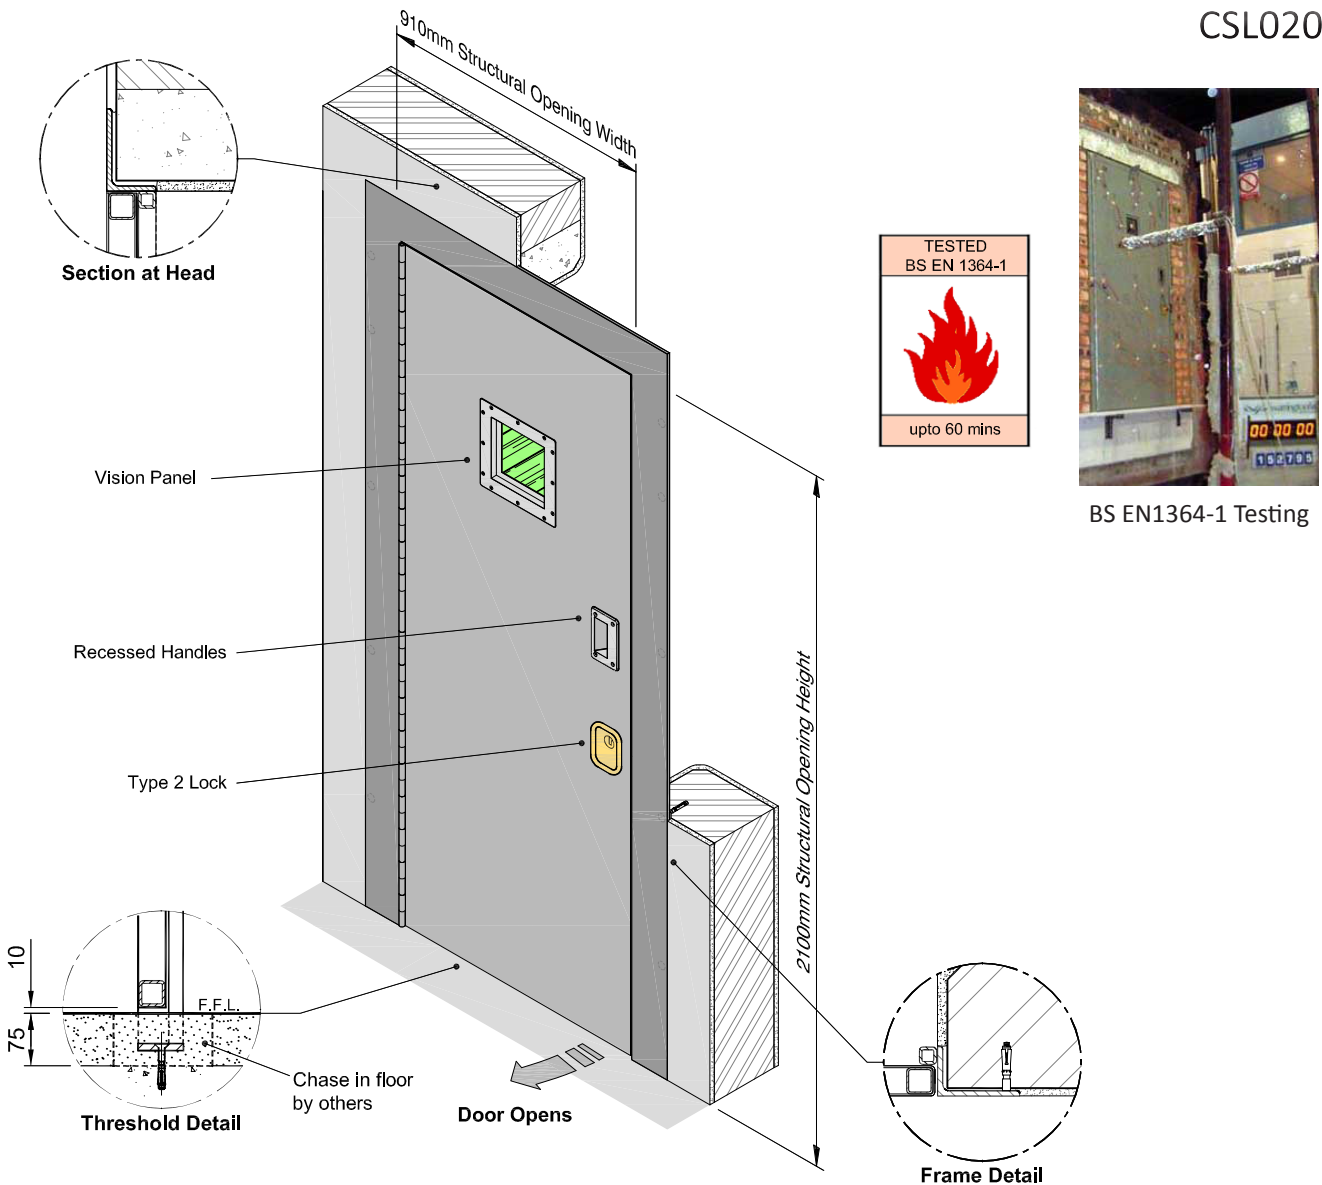

BS EN1364-1 Testing

Specification


- Tested in accordance with BS EN 1364-1 to give up to 60 minute fire resistance, the door is constructed from 40mm wide rolled hollow steel section with 3mm thick steel door skins.
- Mineral wool insulation to all internal voids.
- 125mm x 75mm x 8mm rolled steel angle frame.
- Frame fixings to suit a variety of opening constructions.
- Door panel mounted within door frame hung on a substantial continuous hinge.
- Recessed handles on both sides of door.
- Home Office Type 2 heavy duty mortice deadlock.
- 150mm square vision panel with fire resisting laminated glass.

Finish

- One coat factory applied high build zinc phosphate primer.

Options

- Hinged privacy cover to vision panel.
- Hydraulic door closer.
- Type 1 Cell Lock.
- 12V DC electric strike.
- Smoke seals.
- Veneer finish



CSL0206