

## CSL0590

## Secure Steel Ceiling

**Purpose**

A secure steel plank interlocking internal ceiling system suitable for use in secure areas.

**Specification**

- 1.5mm thick pressed steel planks.
- interlocking design supported by perimeter supports.
- Planks can be perforated or non-perforated.
- Standard plank widths 300mm, 450mm, 600mm.
- Standard plank lengths 2500mm and 3000mm.
- Planks cut to length on site.
- Planks can be insulated above after installation.

**Finish**

- White polyester paint.

**Options**

- Other polyester paint colours available.

## CSL0591

## Secure Mesh Ceiling

**Purpose**

A secure steel mesh ceiling system suitable for use in secure areas.

**Specification**

- 50 x 9.5 x 4mm high tensile woven mesh welded into steel angle panels.
- Bolted together on site supported by perimeter support angles.
- Perimeter supports secured to wall with heavy duty expansion bolts.
- Bespoke panels manufactured to suit site sizes.

**Finish**

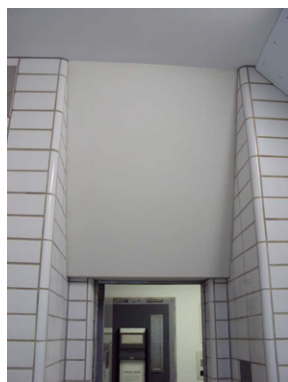
- Hot dip galvanised.

**Options**

- Polyester paint (choice of colours) in lieu of hot dip galvanise.
- Access panels can be incorporated to gain access to services.

## CSL0592

## Corian Bulkhead

**Purpose**

A Corian bonded bulkhead to alleviate the possibility of the detainee climbing above the door entrance.

**Specification**

- Constructed from Corian bonded to a plywood backing.
- Mounted to a timber or steel subframe.
- Secured with expansion bolt fixings.
- Bespoke manufactured to suit site sizes.

**Finish**

- Corian - Cameo white standard, other colours available upon request.