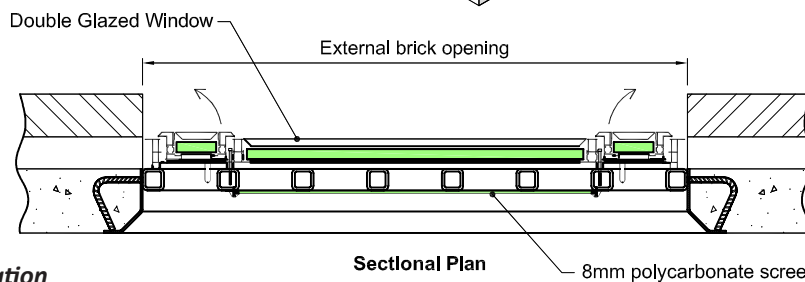
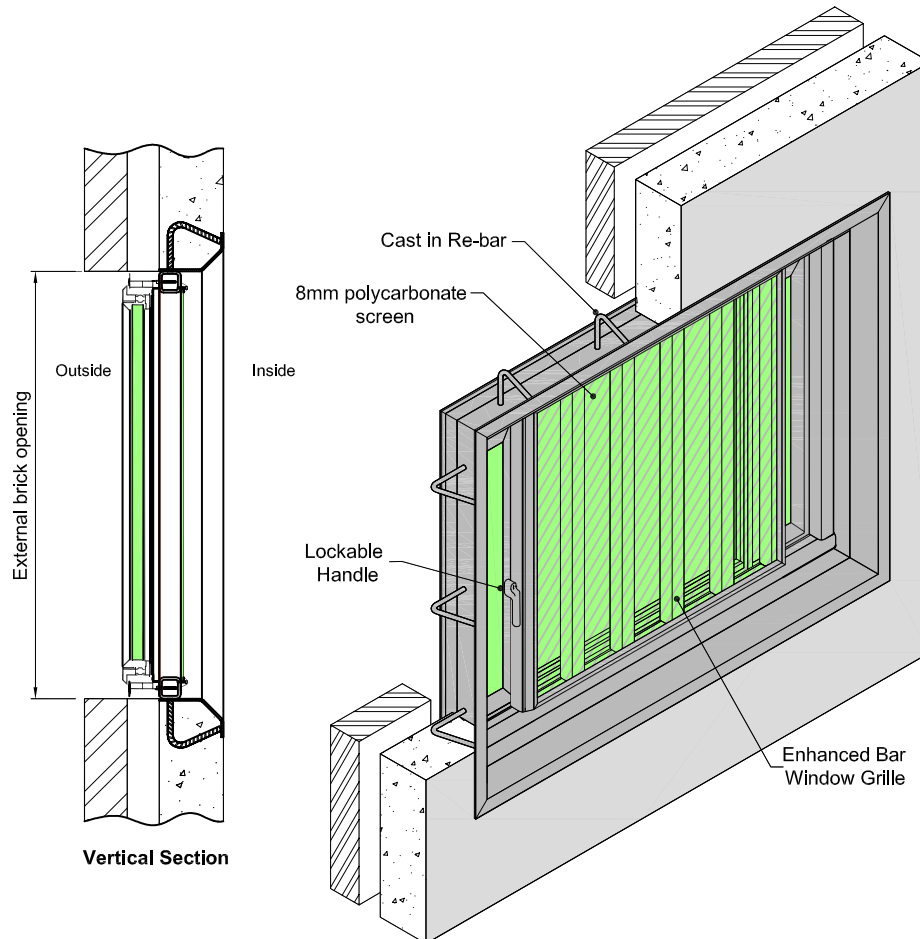


CSL0611

**Specification**


- Compliance with NOMS 2005 cell window development.
- Independently tested by Bureau Veritas to NOMS STD/X/SPEC/024.
- 24 hour cut resistance bars.
- Window assembly meets building regulations part L.
- The grille is constructed from 50mm x 50mm x 6.4mm square hollow section grade 50 D high tensile steel, enhanced with tungsten carbide rods on all corners with all joints hard faced welded.
- Polycarbonate 8mm screen mounted to the internal face.
- External window frame is thermally broken and is constructed from aluminium which can be opened to allow the free flow of air.
- Window Sashes are operable by a lockable handle.

Finish

- The external aluminium window is supplied pre-painted to a gloss white finish.
- Enhanced bar gridded prime painted for finishing painting on site.

Options

- Can be bolt fixed instead of casting.
- Barred grille can be supplied pre-finished white.
- Non-enhanced bars.



CSL0611