



CSL0616

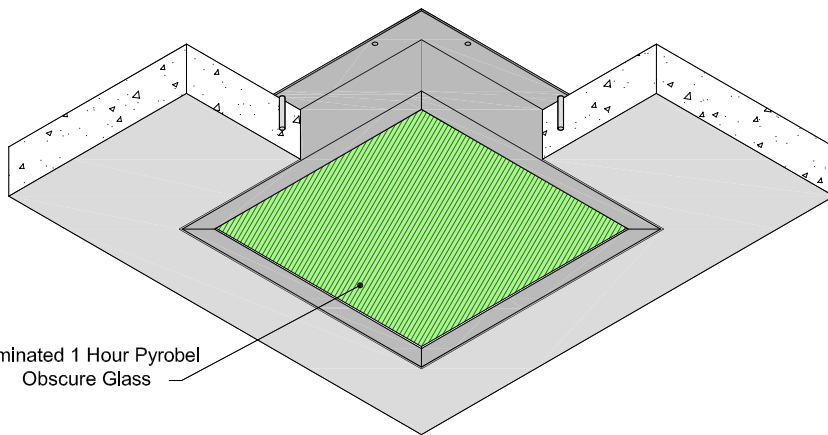

Laminated 1 Hour Pyrobel Obscure Glass

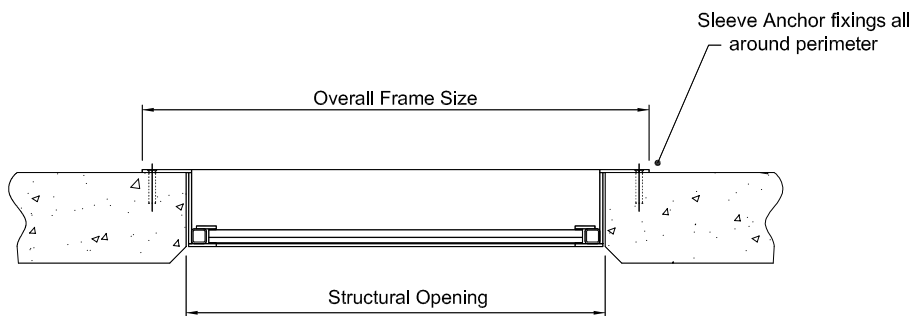

Section

Specification


- 11.5mm thick obscure laminated glass.
- Fixed from above for easy installation and maintenance of glass.

Finish

- High build zinc phosphate primer.

Options

- Polyester powder coated.
- 1 hour fire rated glass.
- Glass serviceable from within the cell instead of above.
- Any custom size.

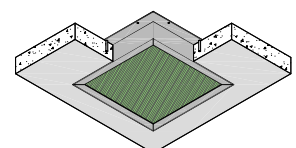

CSL0616