




CSL0618

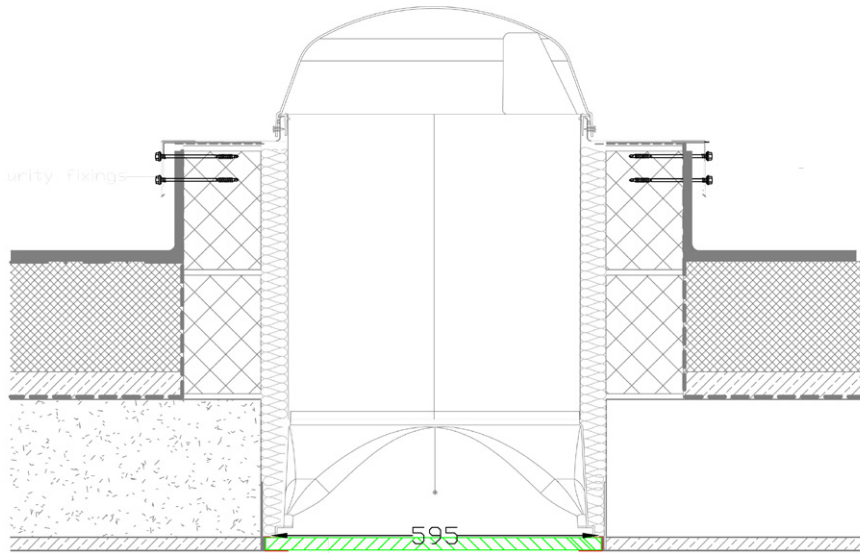

Single Daylight System

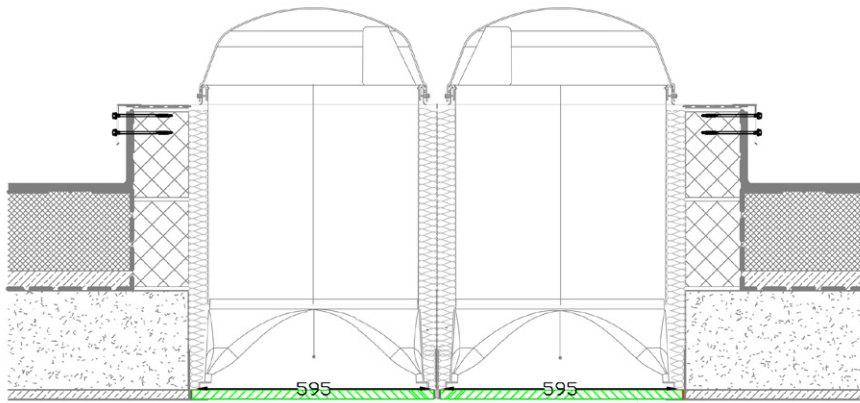

Double Daylight System

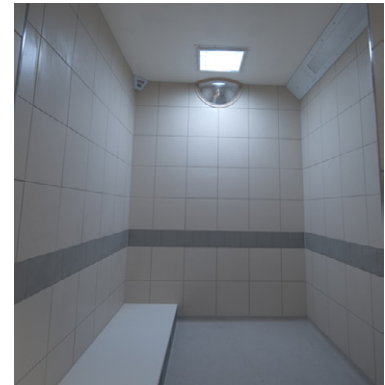

Specification


- Full impact proof UV resistant polycarbonate roof dome.
- Bespoke Weathering Collar to suit flat or pitched roof applications.
- Weathering Collar insulator.
- 99.7% reflective Spectralight Infinity tube material to comply to mean measurements recorded within BRE test report 212921.
- 530mm dia to 600mm x 600mm square transition box with max height of 200mm.
- 595mm x 595mm OptiView Fresnel lens material fixed to glazed and metal frame.

Finish

- Clear polycarbonate cover.
- High reflective Spectralight infinity tube.

Options

- 99.7% reflective Spectralight Infinity angle sections.
- Security bars.
- Daylight Dimmer - Anti-light pollution control - remote and/or fixed switch operation.



CSL0618