


CSL0118

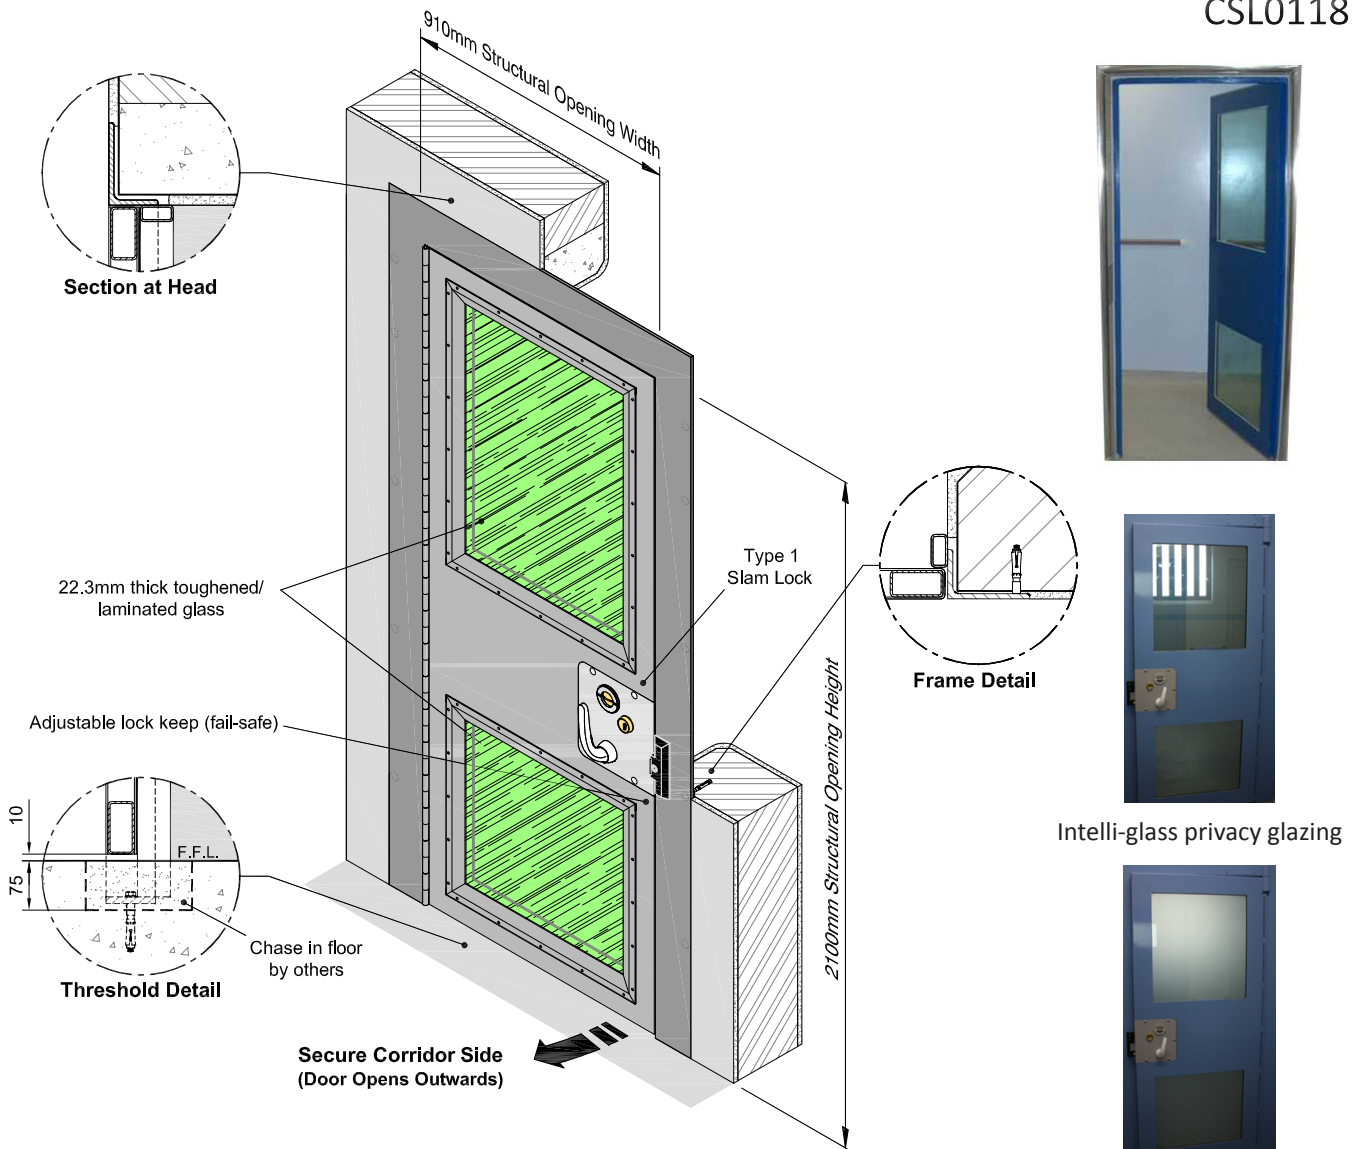

Specification


- Door panel constructed from 40mm wide rolled hollow steel section with 3mm thick steel door skins.
- 125mm x 75mm x 8mm rolled steel angle frame.
- 50mm x 25mm steel rebates.
- Frame fixings to suit a variety of opening constructions.
- Door panel mounted within door frame and hung on a substantial continuous hinge.
- Glass retaining frames are fitted on the corridor side of the door only.
- Standard 22.3mm thick toughened laminated glass.
- Home Office Type 1 slam action lock with adjustable keep.

Finish

- One coat factory applied high build zinc phosphate primer to all mild steel surfaces.

Options

- 0.8mm thick rigidised stainless steel bright annealed skin with glass retaining frame to cell side of door panel (Pattern ref: 12LG).
- 60 minute Fire Resisting.
- Recessed Handles when used in conjunction with 3G112 mortice deadlock.
- Intelli-glass privacy glazing.
- Home Office Type 2 heavy duty deadlock.
- Bullet resisting glass.
- Electric Strike.
- 2 Position hatch.



CSL0118