


CSL0210

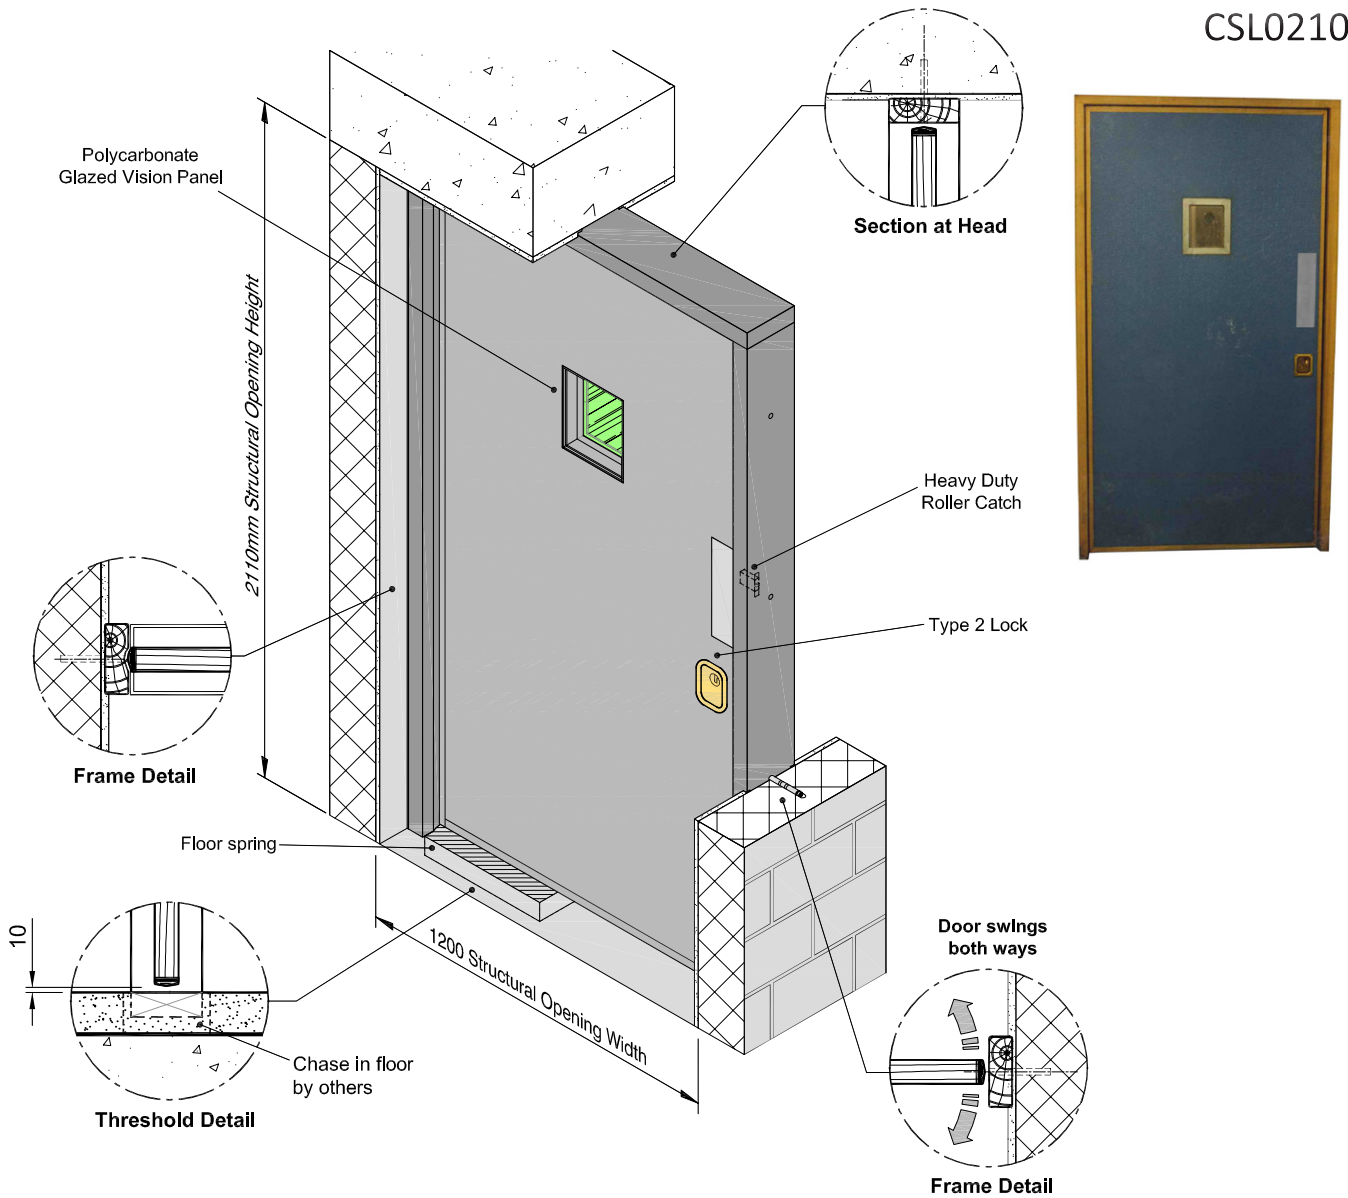

Specification


- Door is constructed from a solid timber core sheeted both sides with Armaglaze panels with Ash Lipping to all four edges, giving a finished door thickness of 60mm.
- Door is mounted within an Ash frame and pivots on a double action floor spring set into the floor.
- Frame fixings to suit a variety of opening construction.
- Supplied as standard with a 215mm x 250mm x 6mm thick polycarbonate vision panel.
- Heavy duty adjustable roller catch.
- Push plates both sides.
- Home Office Type 2 heavy duty mortice deadlock.

Finish

- Armaglaze to any colour within the BS 4800 colour range.
- All timber to have two coats of water-borne varnish.

Options

- Smoke and / or intumescent seals.
- 24.3mm Pyrobel laminated glass (non-certified 60 minute fire rated).



CSL0210