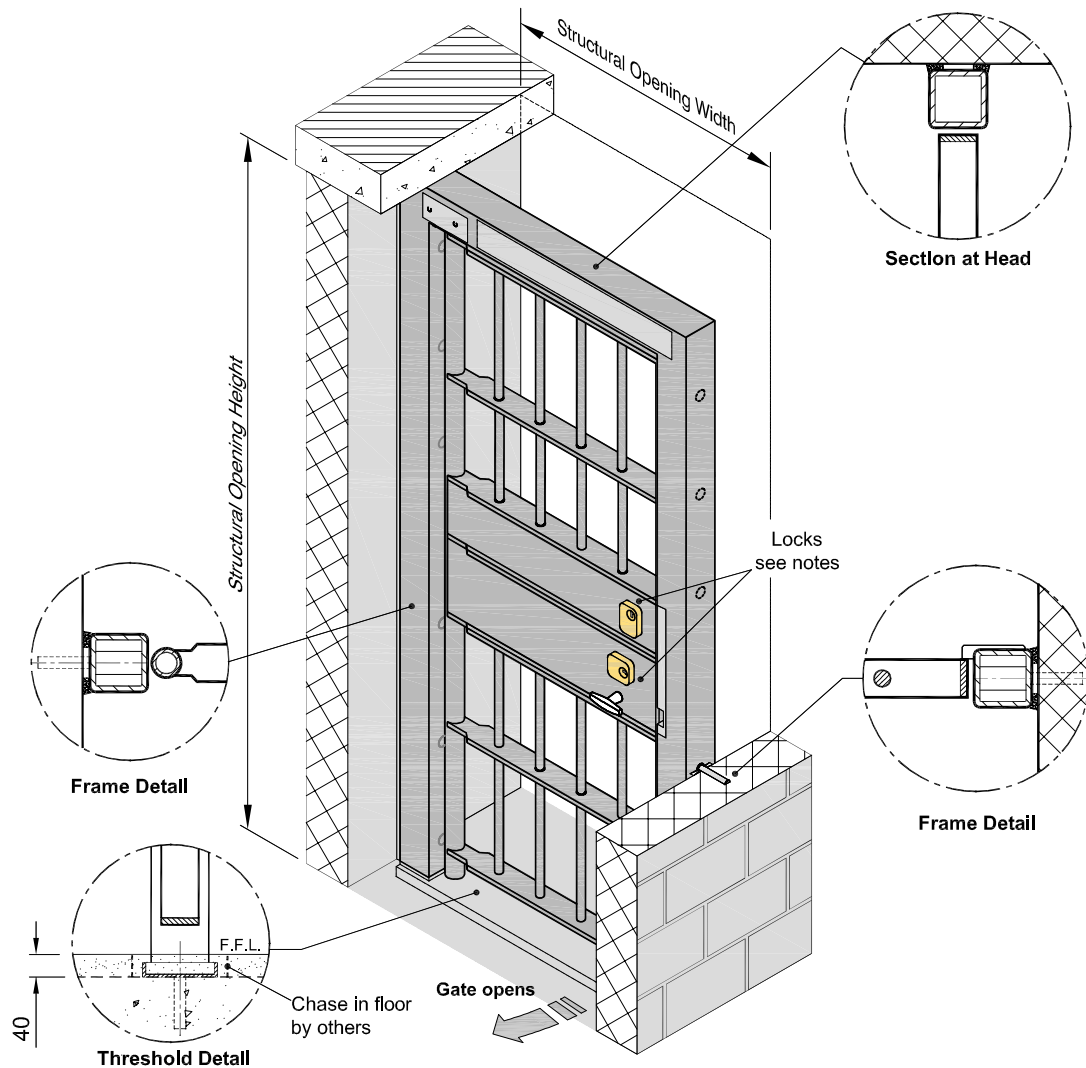


CSL0405

**Specification**


- Gate constructed from a 65mm x 12mm steel flat framework with 30mm diameter solid steel vertical bars and mounted within a steel hollow section frame, fixed by chemical resin anchors and hung from a full height tubular steel pivot hinge.
- Both gate and frame can be supplied with preparation for any mechanical and electrical locking variation specified.
- The frame is provided with removable panels to allow access to electrical wiring. (All removable panels are secured with tamper resistant screws, tamper proof switches can be supplied fitted and wired by others to monitor plate removal).
- Locks and electrical components are supplied and fitted by others.

Finish

- One coat factory applied high build zinc phosphate primer.

Options

- Galvanized finish.



CSL0405