

## Centre LED Light

CSL1104

The centre LED light utilises the latest advancements in patented LED technology to provide the highest quality of uniformly distributed light combined with substantial energy savings of typically 60%. These lights have been designed to be ligature resisting, very robust and secure. Ideal to be used in high risk areas.

### Specification


- Suitable for high security & high risk areas. ie cells and corridors.
- 1250x300x65mm (LxWxH).
- Three light levels can be incorporated (500,300,15 lux).
- Emergency backup available (battery 3 hours or AC voltage input)
- Home Office Approved.
- IP65 & IK10+ rated.
- 14 years maintenance free life (based on 12 hours a day usage).
- Efficiency: Typically uses over 60% less energy than traditional fluorescent fittings.
- Zero Maintenance: Reducing costs and the disruption caused by routine maintenance.
- An estimated lifetime of over 60,000 hours.
- Glare-free, uniformly distributed light output, achieving LG Standards Lux levels.
- Operates voltages between 100-277 Volts AC.
- LED Type Phillips Rebel (ES) 3000k - 4500k as standard (other colour temperatures available).
- Ceiling mounted through the main body.
- When Hard pick mastic is applied to outer body you can still service the light if required.
- 5 Years Warranty.



- CSL1104A  
Single operation (on / off)
- CSL1104B  
Twin operation (on / off / night light)
- CSL1104C  
Triple operation (high / on / off / night light)
- CSL1104xA  
Emergency AC backup
- CSL1104xB  
Emergency 3 hour battery backup

### Finish

- Metallic with a polycarbonate facia.

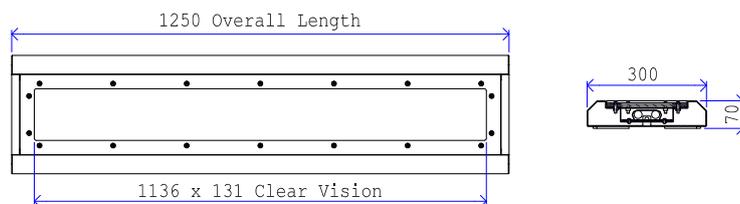

## Square LED Light

CSL1105

The square LED light utilises the latest advancements in patented LED technology to provide the highest quality of uniformly distributed light combined with substantial energy savings of typically 60%. These lights have been designed to be ligature resisting, very robust and secure. Ideal to be used in high risk areas.

### Specification

- Suitable for high security & high risk areas. ie corridors or stairwells.
- 300x300x65mm (LxWxH)
- Available in 12w (28w comparable version).
- Three light levels can be incorporated (500,300,15 lux).
- Emergency backup available (battery 3 hours or AC voltage input)
- Home Office Approved.
- IP65 & IK10+ rated.
- 14 years maintenance free life (based on 12 hours a day usage).
- Efficiency: Typically uses over 60% less energy than traditional fluorescent fittings.
- Zero Maintenance: Reducing costs and the disruption caused by routine maintenance.
- An estimated lifetime of over 60,000 hours.
- Glare-free, uniformly distributed light output, achieving LG Standards Lux levels.
- Operates voltages between 100-277 Volts AC.
- LED Type Phillips Rebel (ES) 3000k - 4500k as standard (other colour temperatures available).
- Ceiling mounted through the main body.
- When Hard pick mastic is applied to outer body you can still service the light if required.
- 5 Years Warranty.



- CSL1105  
Standard
- CSL1105A  
Emergency AC backup
- CSL1105B  
Emergency 3 hour battery backup

### Finish

- Metallic with a polycarbonate facia.

