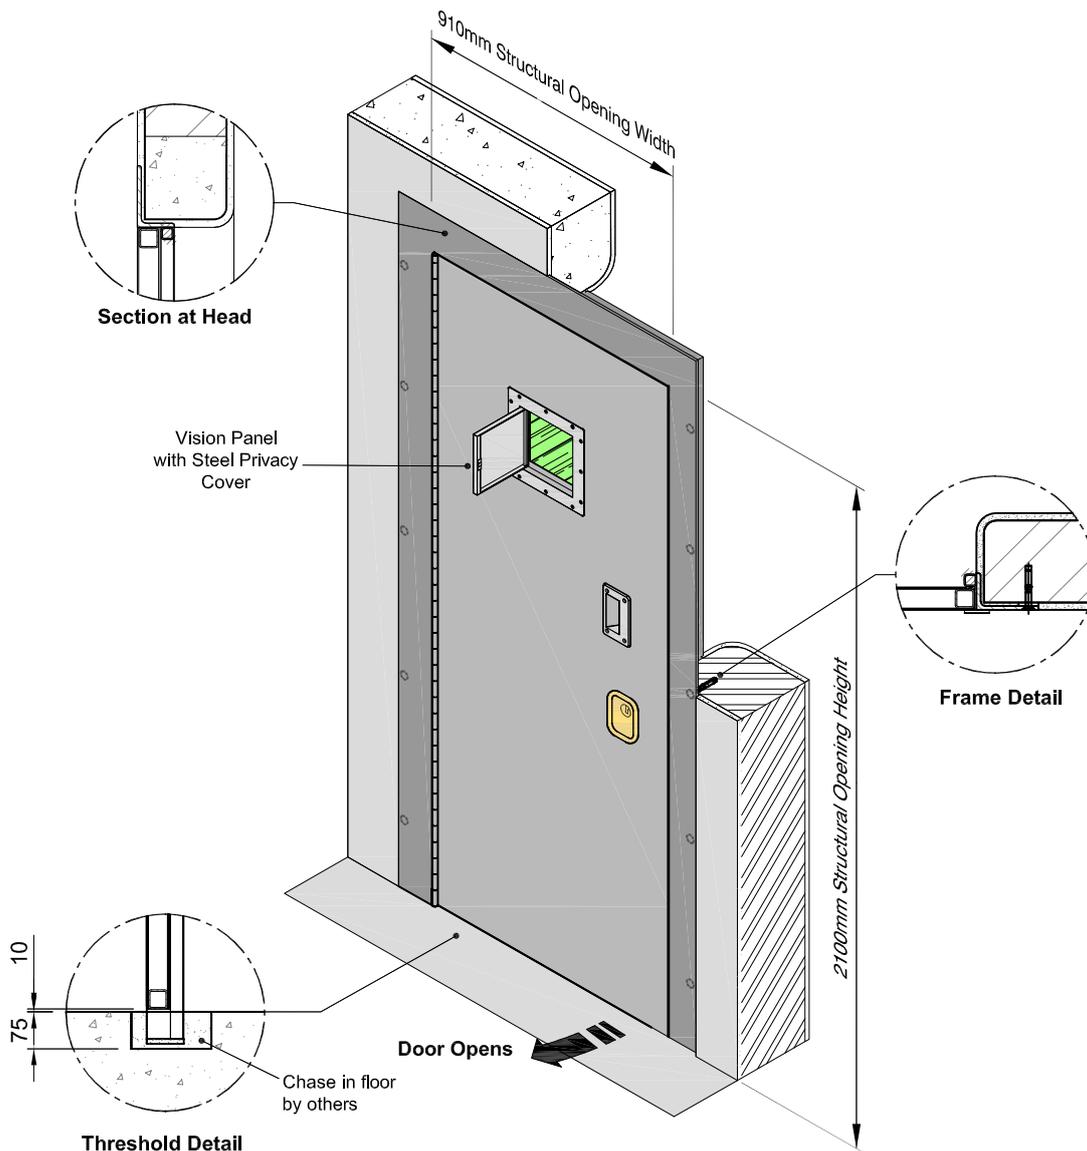


## CSL0119

**Specification**


- Door is constructed from a solid timber core sheeted both sides and all edges with 1.6mm thick zintec steel skins pressure bonded to core, interlocked and riveted to give a finished door thickness of 50mm.
- Door is mounted within a 125mm x 75mm x 8mm rolled steel and frame and hung from a substantial continuous hinge.
- Frame fixed into the structural opening with concealed 12mm dia sleeve anchors.
- 150mm square x 21mm thick laminated glass vision panel with hinged steel cover.
- Home Office Type 2 heavy duty mortice deadlock with adjustable keep.
- Recessed handle corridor side only.
- Tolerance between door panel and rebate conforms to current Home Office specification not to exceed 2mm.

**Finish**

- One coat factory applied high build zinc phosphate primer to all mild steel surfaces.

**Options**

- Vertical louvered viewer.
- Circular gasket free viewer.
- Concealed door closer.



CSL0119