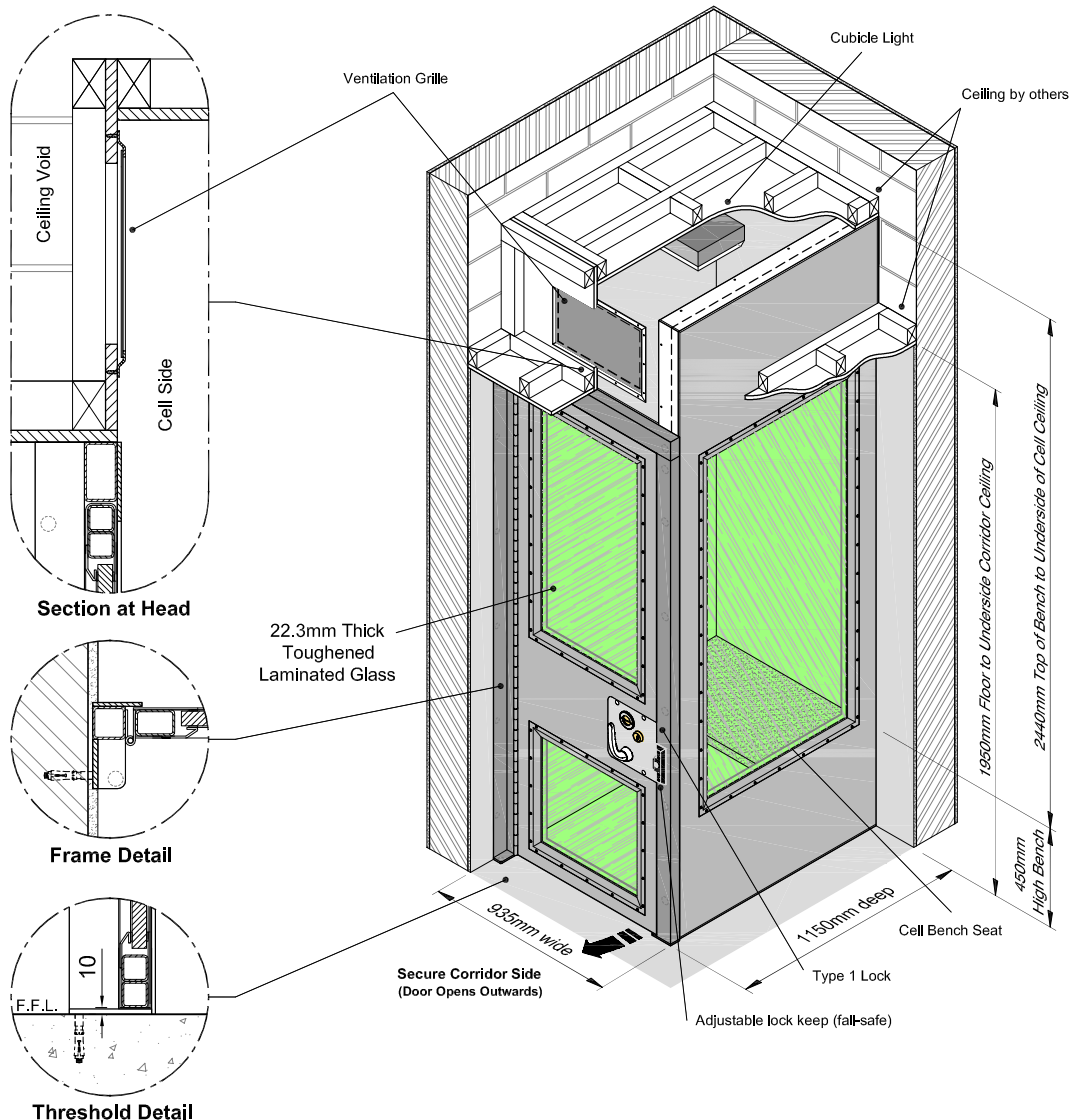


## CSL0121

**Specification**


- Door panel and fixed panels are constructed from 40mm wide steel hollow section framework sheeted both sides with 3mm thick steel skins.
- All glazing is 22.3mm thick toughened laminated glass, the glass retaining frames are secured on the external side of the unit.
- The door panel is hung from a substantial continuous hinge.
- Fixings to suit a variety of opening constructions.
- The door is supplied as standard with a Home Office Type 1 slam action cell lock.

**Finish**

- One coat factory applied high build zinc phosphate primer to all mild steel surfaces.

**Options**

- Multiple (side by side) units.
- Privacy glazing.
- None glazed side panels.
- High level Ventilation Grille.
- Ventilation grille within door panel.
- Cubicle Light.



CSL0121