


CSL0122

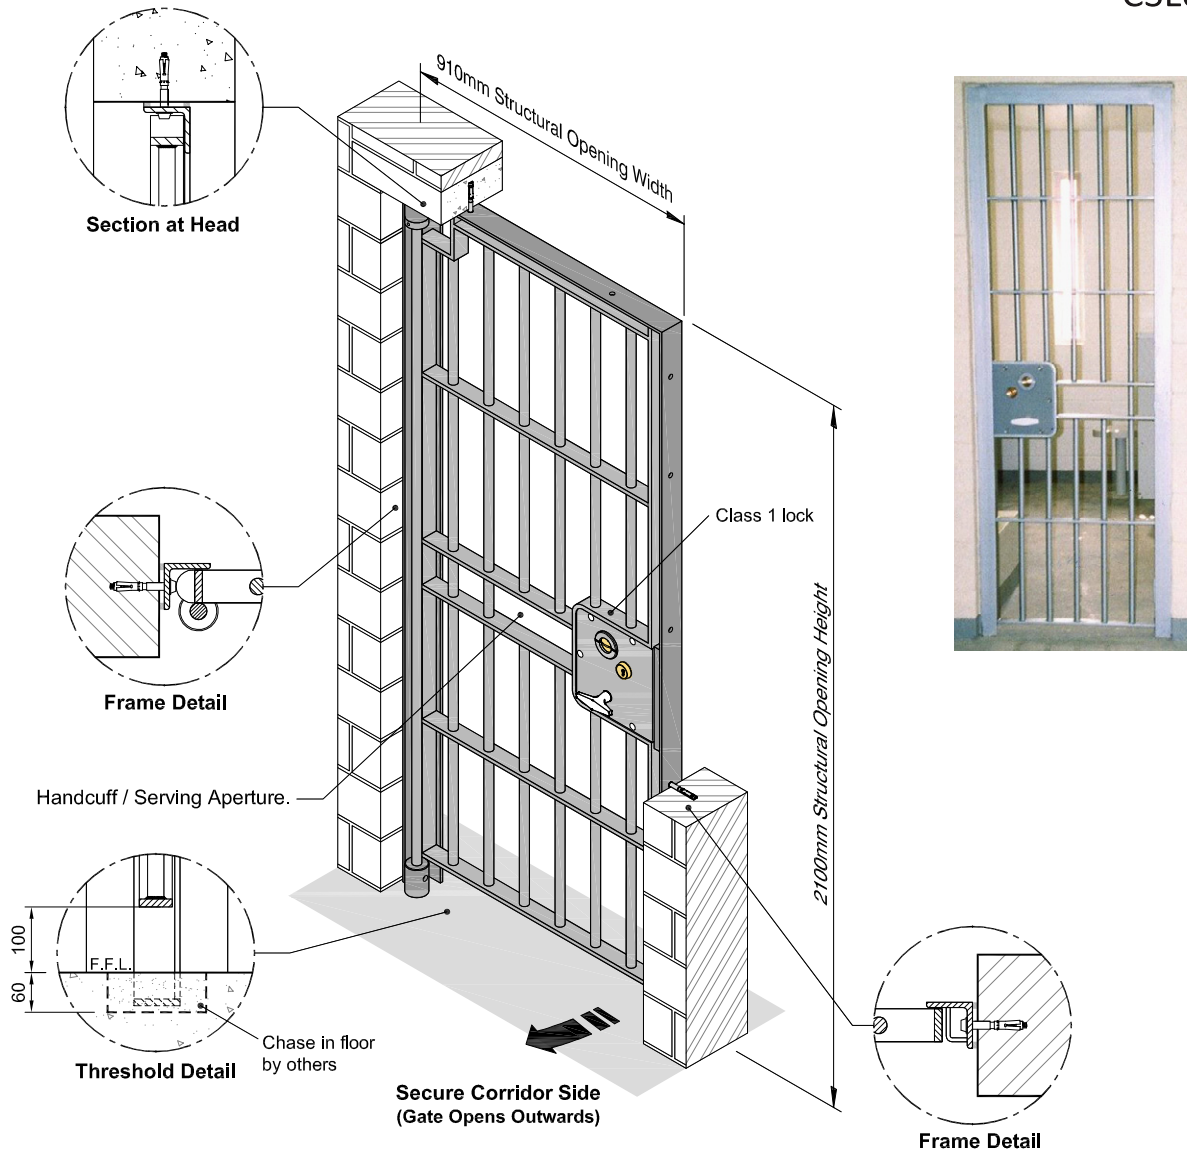

Specification


- Gate is constructed from 50mm x 12mm flat steel framework with 25mm diameter solid vertical bars.
- Mounted on a 70mm x 70mm x 8 rolled steel angle frame with a full height stainless steel hinge pin.
- Top and bottom pivot hinges bushed, base hinge incorporates a ball bearing to reduce hinge friction and giving ease of movement.
- Frame fixings to suit a variety of opening construction.
- Class 1 heavy duty slam action lock.

Finish

- One coat factory applied high build zinc phosphate primer to all mild steel surfaces.

Options

- Galvanized.
- Polyester Powder Coated.
- Any arrangement of side or header panels can be provided.



CSL0122