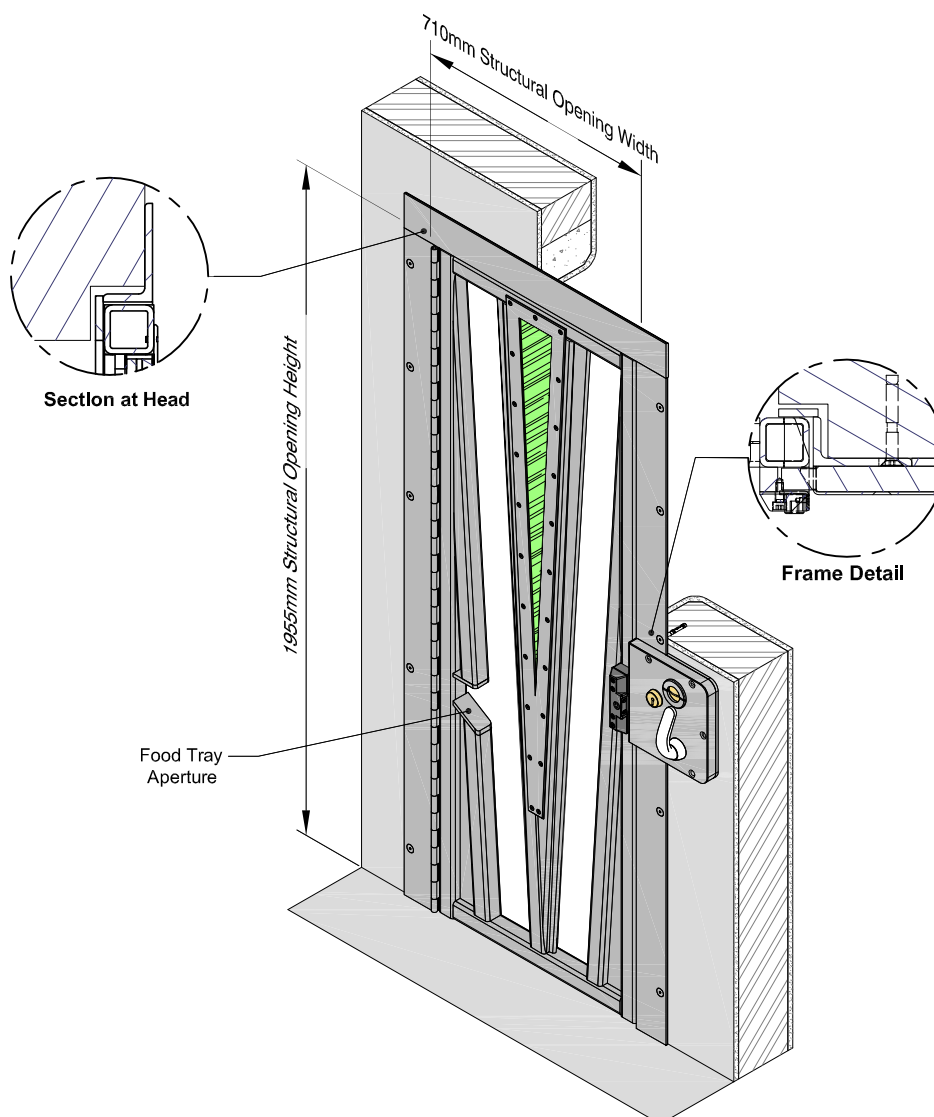


CSL0123

**Specification**


- Gate constructed from 50 x 50mm stainless steel rolled hollow section.
- Unique tapering design to prevent the attachment of ligatures.
- Continuous hinge stainless steel 304.
- Rolled stainless steel grade 304 angle frame secured with heavy duty expansion bolts.
- Supplied with or prepared for frame mounted class 1 cell lock.
- 24mm thick toughened glass laminated polycarbonate vision panel.
- Food pass aperture.
- 45% ventilation and 50% light transmission.

Finish

- Satin stainless steel.

Options

- Painted mild steel in lieu of stainless steel.



CSL0123