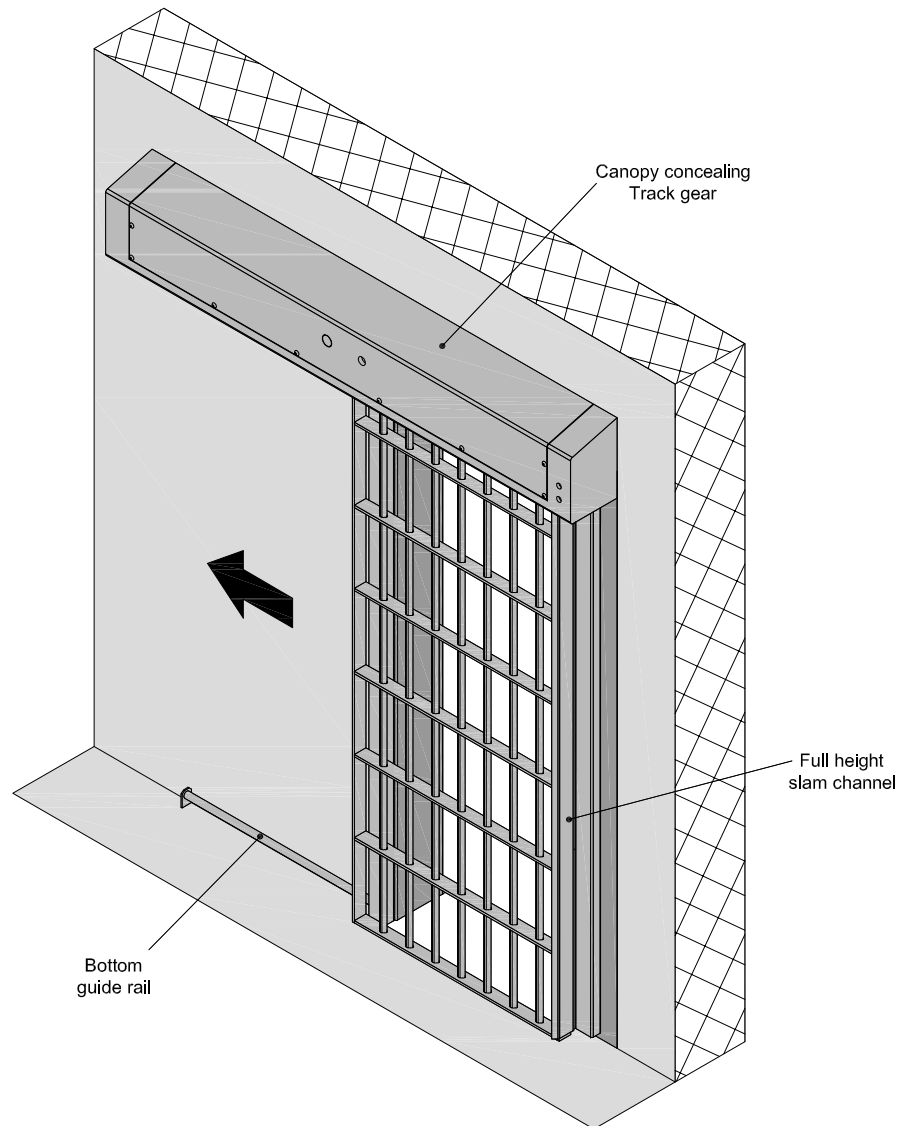


CSL0127

**Specifications**


- Gate panel conforms to ASTM A627.
- Constructed from 2 1/4" x 3/8" flat steel bar framing and horizontals with 7/8" diameter double ribbed interlocking vertical bar.
- Steel subframe fixed to door opening incorporating a full height slam channel and bottom guide rail.
- Manual or electronically driven top track.
- Mechanical frame mounted lock for manual sliding gates or electronic locking for electronically driven gates to ASTM F1643-05.
- Lockable pressed steel canopy incorporating track gear.
- Canopy incorporates a mechanical unlock / override facility for electronically driven gates.

Finish

- One coat factory applied high build zinc phosphate primer to all mild steel surfaces.

Options

- Available right or left hand.
- Tool resistant anti-cut double ribbed round and flat bars to ASTM A627-03.
- Food pass aperture.
- Canopy can incorporate status indicator lights to show open, locked and in travelling positions for electronically driven gates.
- Electronic controls to control multiple gates.



CSL0127