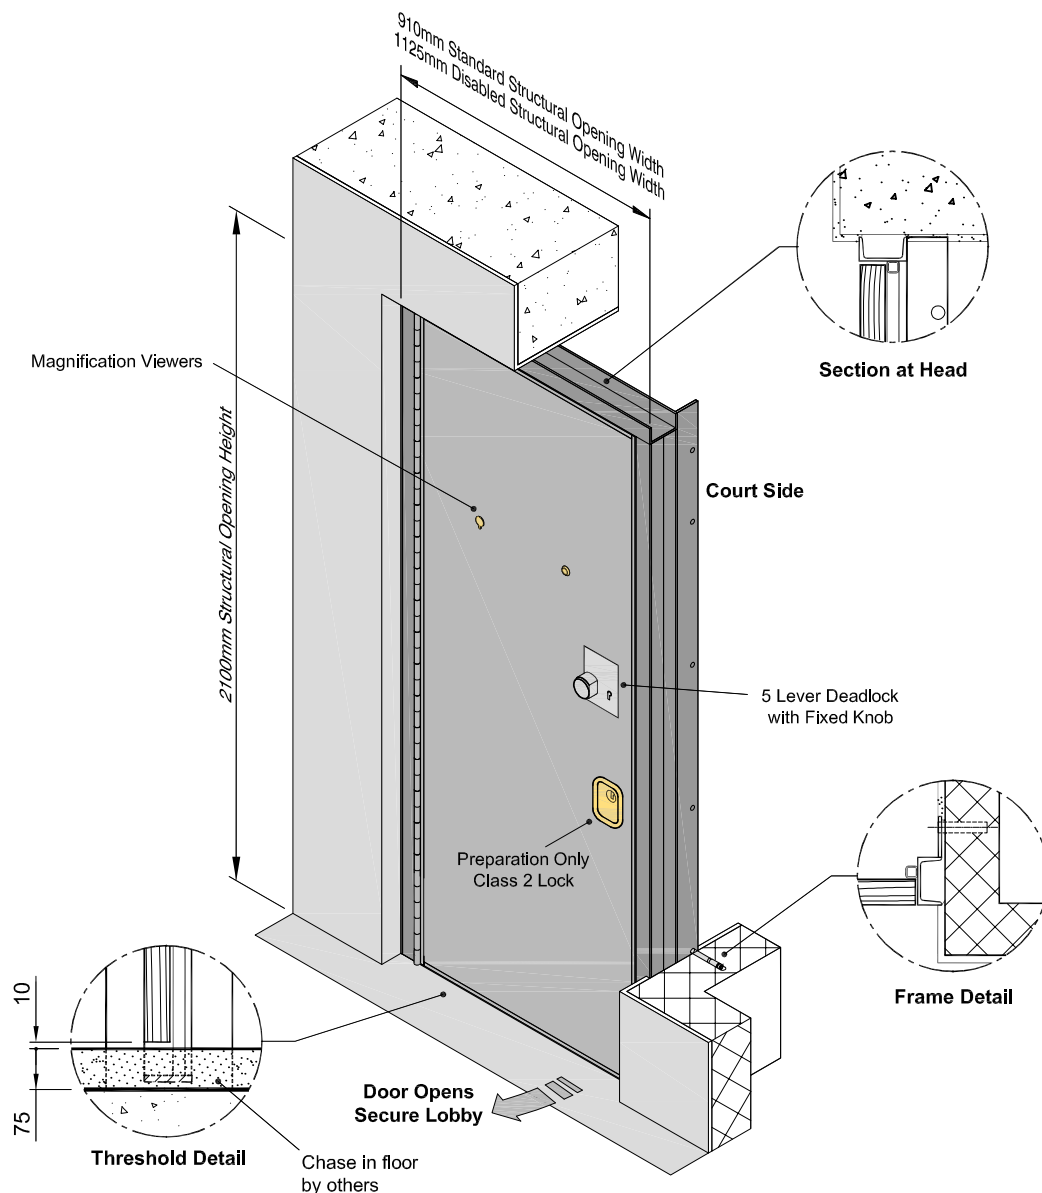
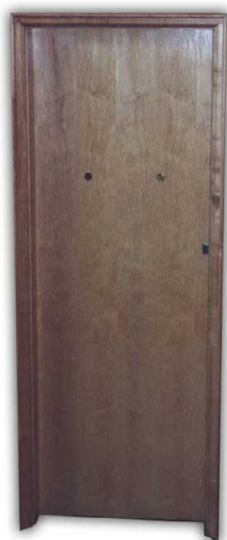


CSL0205

**Specification**


- Door leaf constructed from a solid timber core sheeted both sides with 1.6mm thick zintec steel skins pressure bonded to core, interlocked and riveted to give a finished door thickness of 50mm.
- Door leaf mounted within a 100mm x 50mm rolled steel channel frame and hung from a substantial continuous hinge.
- Frame fixings to suit a variety of opening constructions.
- Supplied as standard with two magnification viewers to provide viewing from either side.
- Five lever mortice deadlock, one fixed knob handle to secure side only.
- Preparation for a HMCS Class 2 heavy duty mortice deadlock supplied and fitted by HMCS on site.

Finish

- One coat factory applied high build zinc phosphate primer.

Options

- Door leaf can be veneered both sides to match courtroom panelling.
- Rolled steel angle or pressed profile frame to suit site conditions.
- Fire rated version available.



CSL0205