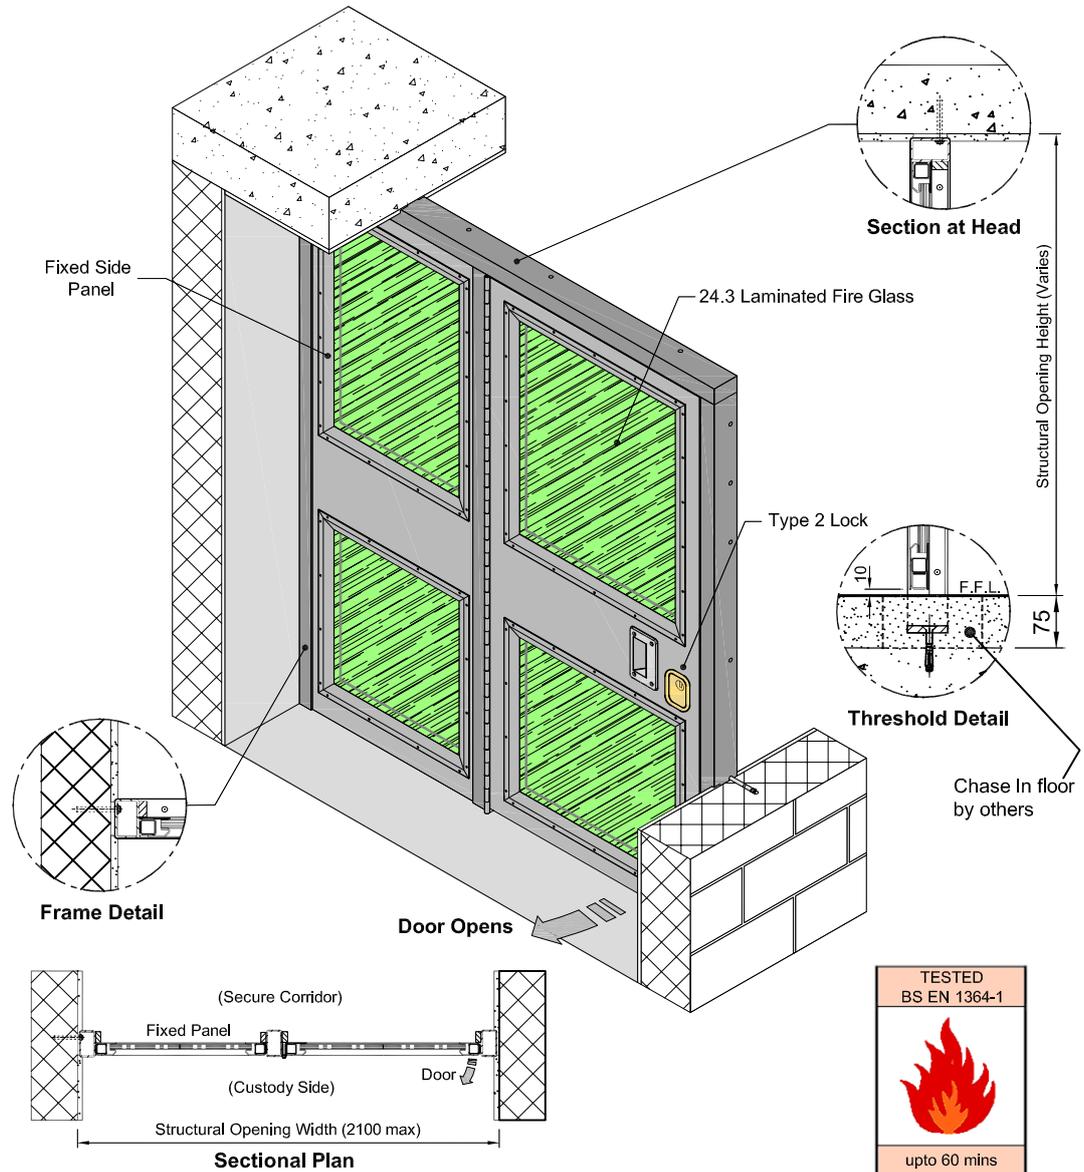


CSL0207

**Specification**


- Tested in accordance with BS EN 1364-1 to give up to 60 minute fire resistance.
- Door and fixed panels are constructed from 40mm wide steel hollow section framework sheeted both sides with 3mm thick steel skins, mounted within a 100mm x 60mm rolled hollow section frame.
- All glazing is laminated, fire resisting and complies with BS 5544:1978 specification for anti-bandit glazing.
- The door is hung from a substantial continuous hinge.
- Fixings to suit a variety of opening constructions.
- The door is supplied as standard with a recessed pull handles on both sides of the door and fitted with a Home Office Type 2 heavy duty mortice deadlock.

Finish

- One coat factory applied high build zinc phosphate primer.

Options

- Home Office Type 1 slam action cell lock.
- Smoke seals.
- Hydraulic door closer.
- 12V DC electric strike.



CSL0207