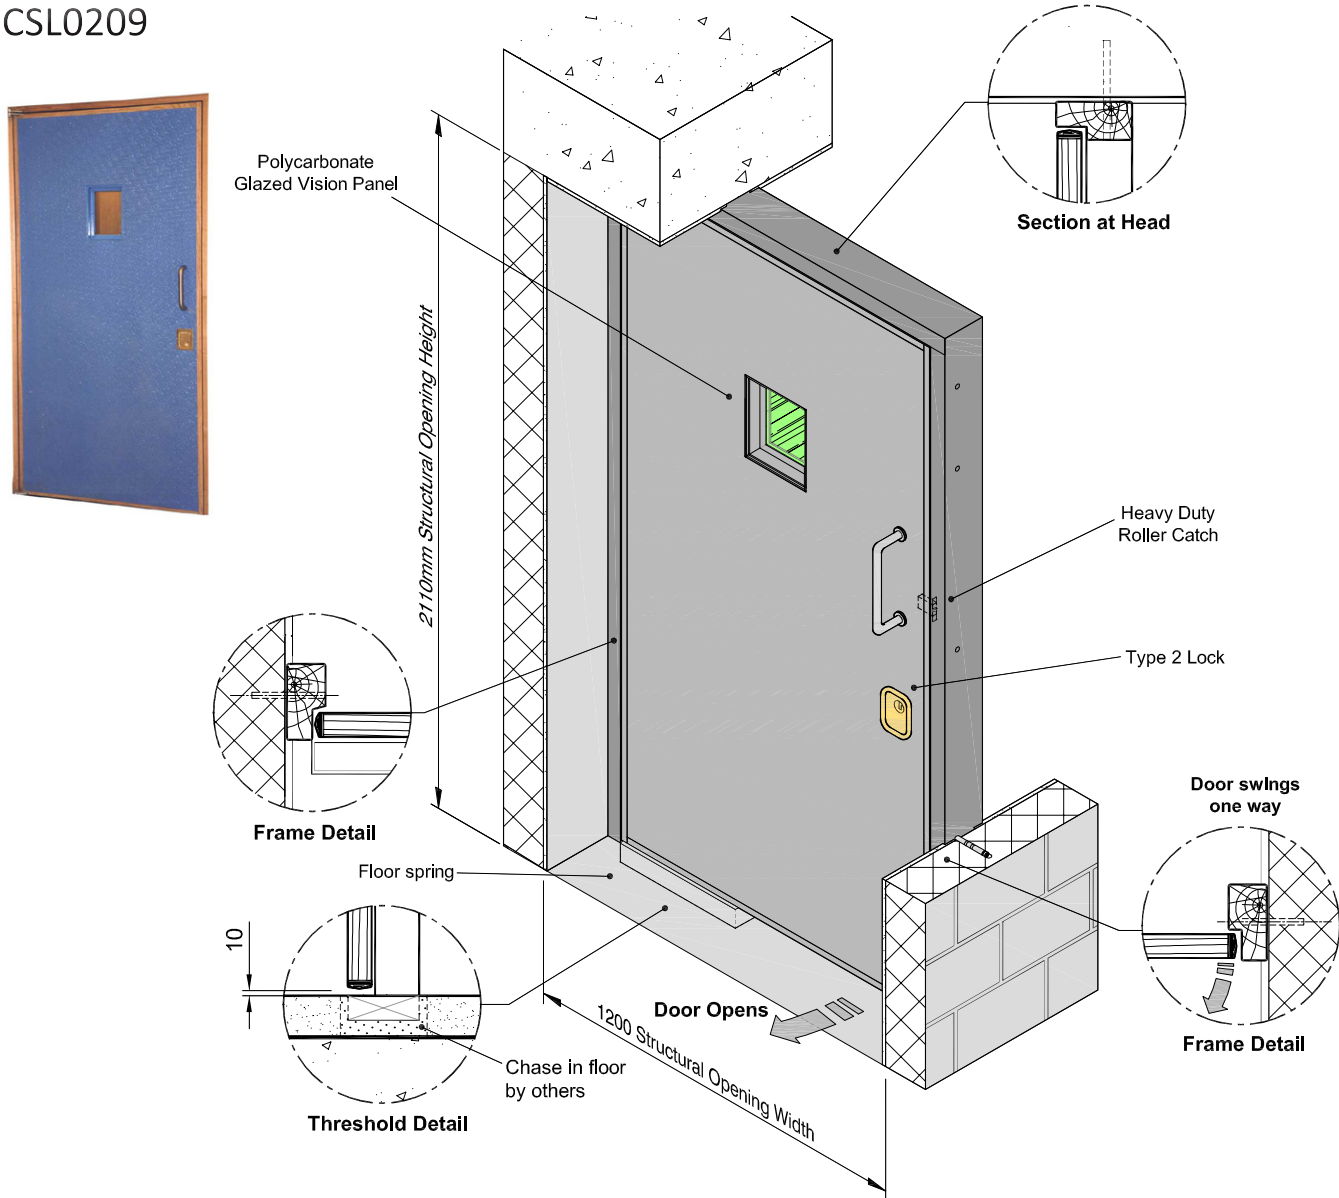


## CSL0209

**Specification**


- Door is constructed from a solid timber core sheeted both sides with Armaglaze panels with Ash Lipping to all four edges, giving a finished door thickness of 60mm.
- Door is mounted within an Ash frame and pivots on a single action floor spring set into the floor.
- Frame fixings to suit a variety of opening construction.
- Supplied as standard with a 215mm x 250mm x 6mm thick polycarbonate vision panel.
- Heavy duty adjustable roller catch, one 'D' handle to pull side, push plate to push side.
- Home Office Type 2 heavy duty mortice deadlock.

**Finish**

- Armaglaze to any colour within the BS 4800 colour range.
- All timber to have two coats of water-borne varnish.

**Options**

- Smoke and / or intumescent seals.
- 24.3mm Pyrobel laminated glass (non-certified 60 minute fire rated).



CSL0209