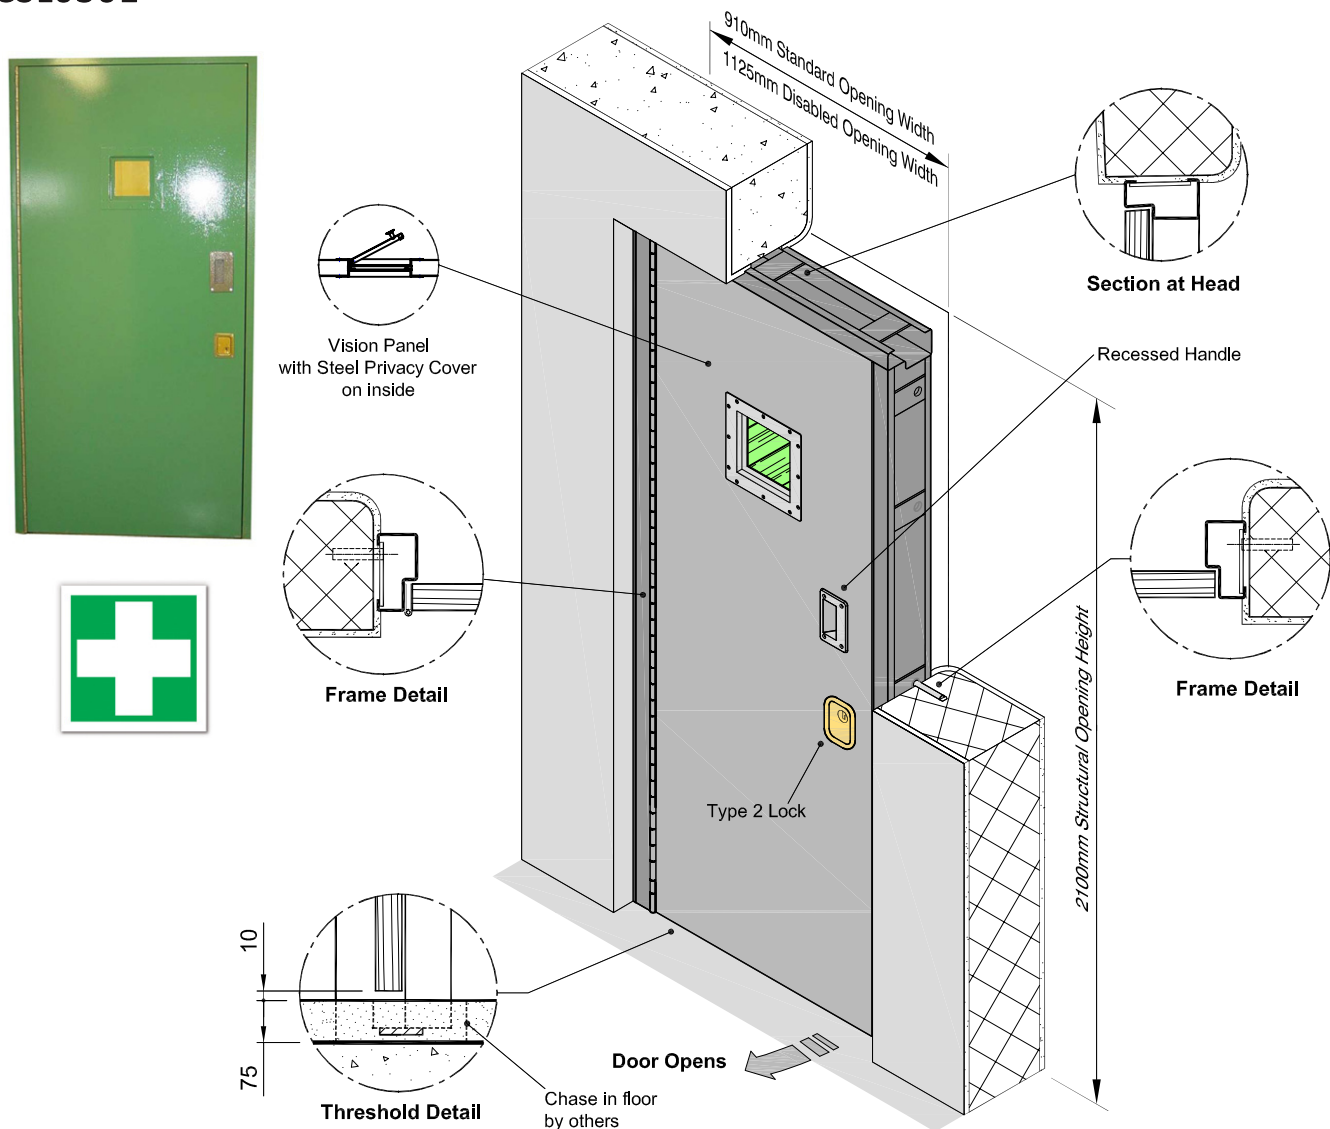


CSL0301

**Specification**


- Door is constructed from a solid timber core sheeted both sides with 1.6mm thick zintec steel skins pressure bonded to core, interlocked and riveted to give a finished door thickness of 50mm.
- Door is mounted within a 3mm thick steel profile frame and hung from a substantial continuous hinge.
- Frame fixings to suit a variety of opening construction.
- Supplied as standard with 150mm square x 9.5mm thick laminated glass window with hinged steel privacy cover.
- Recessed pull handle on each side of the door.
- Home Office Type 2 heavy duty mortice deadlock.

Finish

- One coat factory applied high build zinc phosphate primer.

Options

- Hydraulic door closer.



CSL0301