


CSL0304

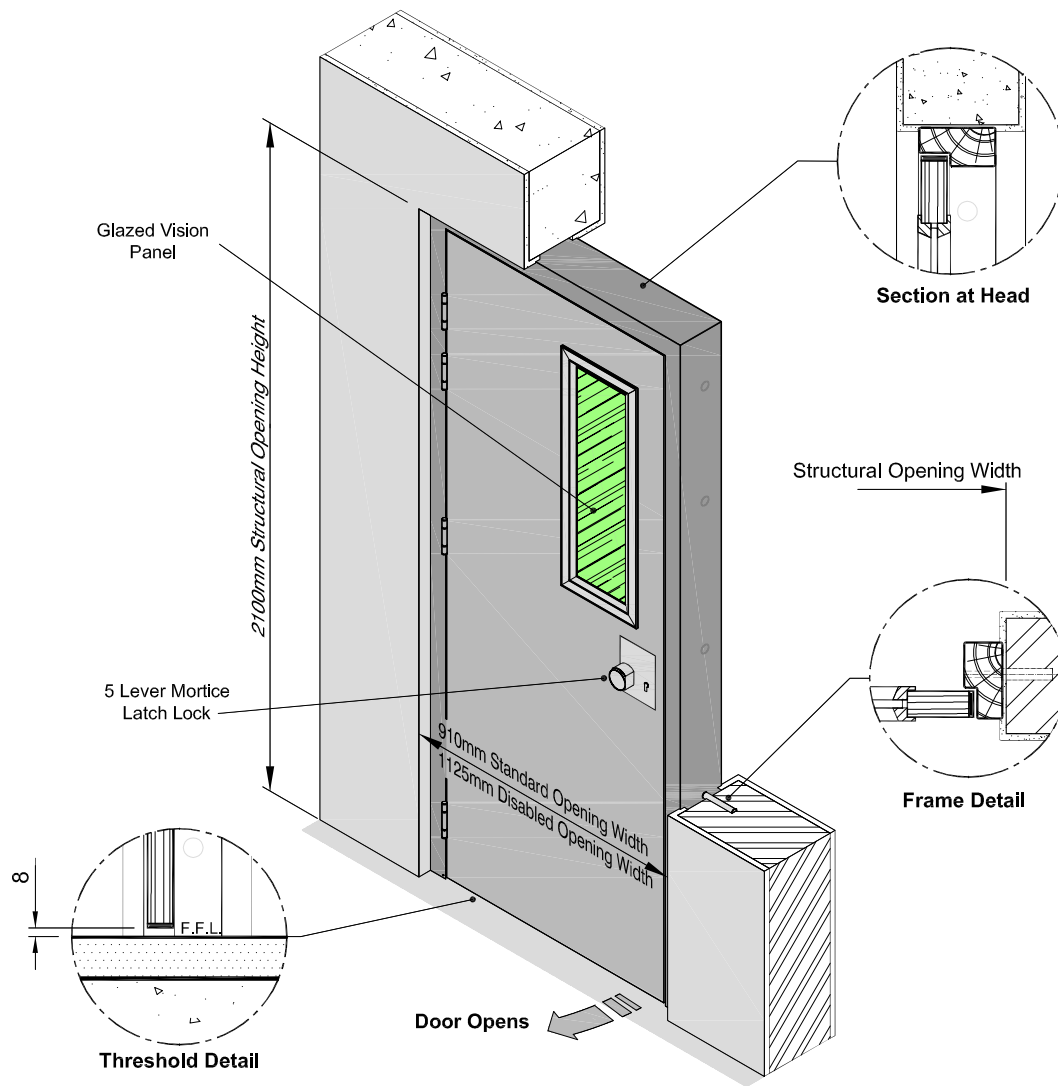

Specification


- Door is constructed from 54mm thick solid timber core faced both sides with plywood veneer and 9mm lipping to vertical and horizontal edges.
- Door is mounted within a hardwood profile frame and is hung from 4 No x 100mm triple knuckle butt hinges.
- Frame fixings to suit a variety of opening construction.
- Supplied as standard with 11.5mm thick laminated glass vision panel (maximum size 0.45 M.)
- 5 lever mortice locking latch operable from both sides.

Finish

- One coat factory applied primer.

Options

- Steel profile frame.
- One coat varnish finish instead of primer.
- Veneer finish.
- Anti-ligature hardware.
- Hydraulic door closer.
- Vision panel.
- Flush ring handle(s) instead of knob furniture.
- 60 minute Fire Rating with door closer, fire rated glass, intumescent seals and smoke seals.



CSL0304