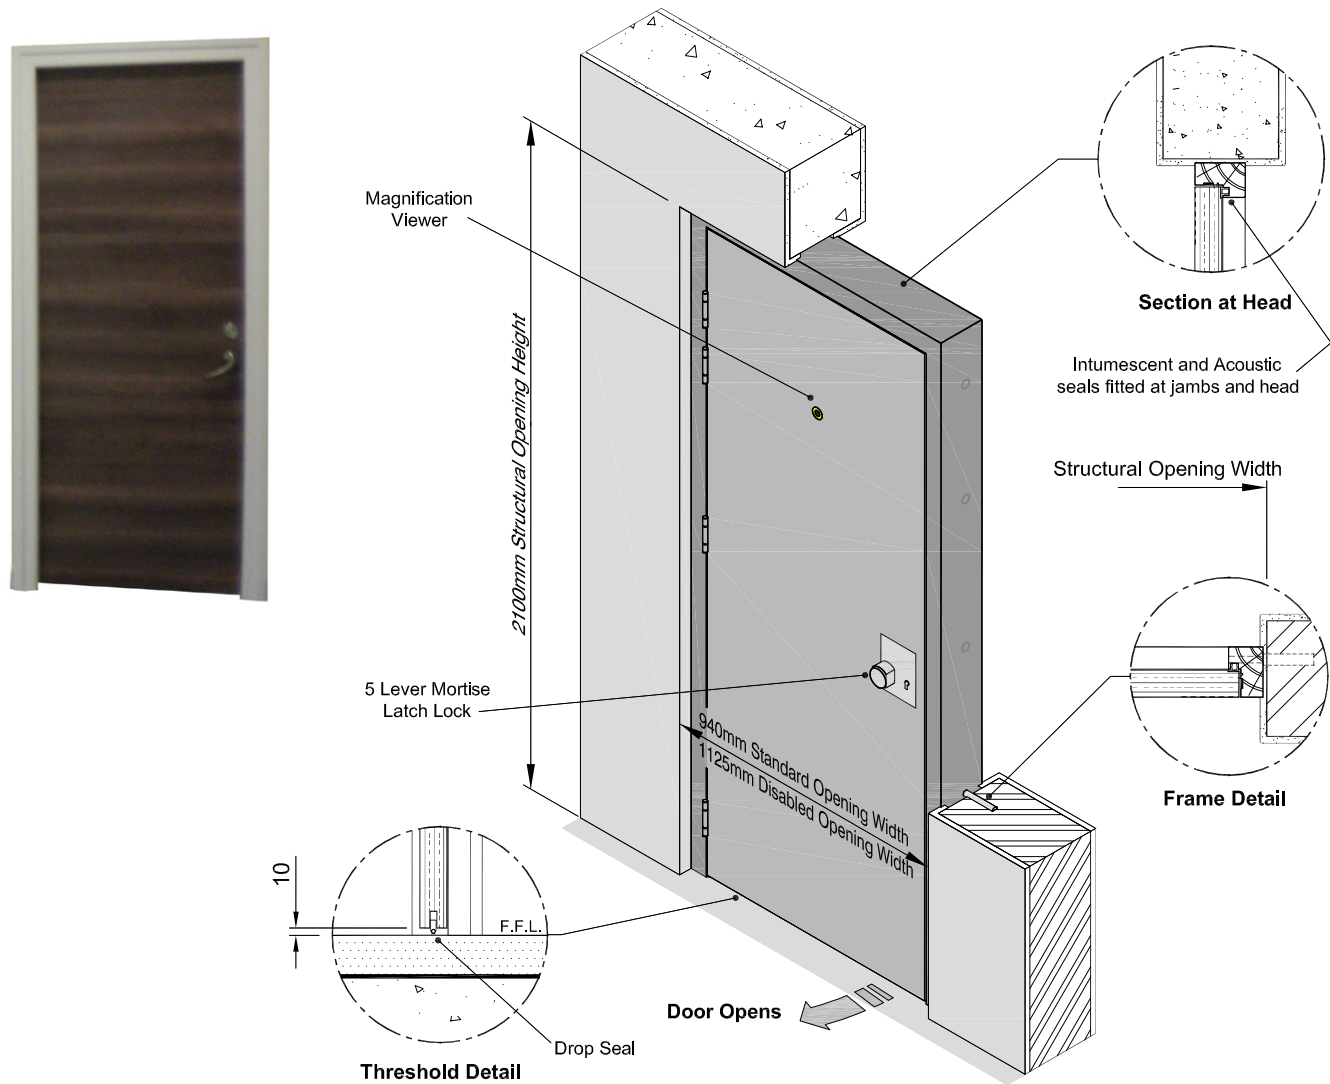


CSL0305

**Specification**


- Door is constructed from a 54mm solid timber core faced both sides with plywood veneer and 9mm lipping to vertical and horizontal edges.
- Door is mounted within a hardwood profile frame and is hung from 4 No x 100mm triple knuckle butt hinges.
- Frame fixings to suit a variety of opening construction.
- Acoustic and intumescent seals with rubber fins to all rebates.
- Drop seal to bottom edge of door.
- Magnification Viewer.
- 5 lever mortise locking latch operable from both sides.

Finish

- One coat factory applied primer.

Options

- Available in 39db or 44db rating.
- One coat varnish finish instead of primer.
- Veneer finish.
- Anti-ligature hardware.
- Flush ring handles instead of knob furniture.
- 60 minute Fire Rating
- Intumescent seals and/or smoke seals.
- Hydraulic door closer.



CSL0305