


CSL0310

SECTION 3

CELL SECURITY LIMITED

PERSONNEL DOORS

65

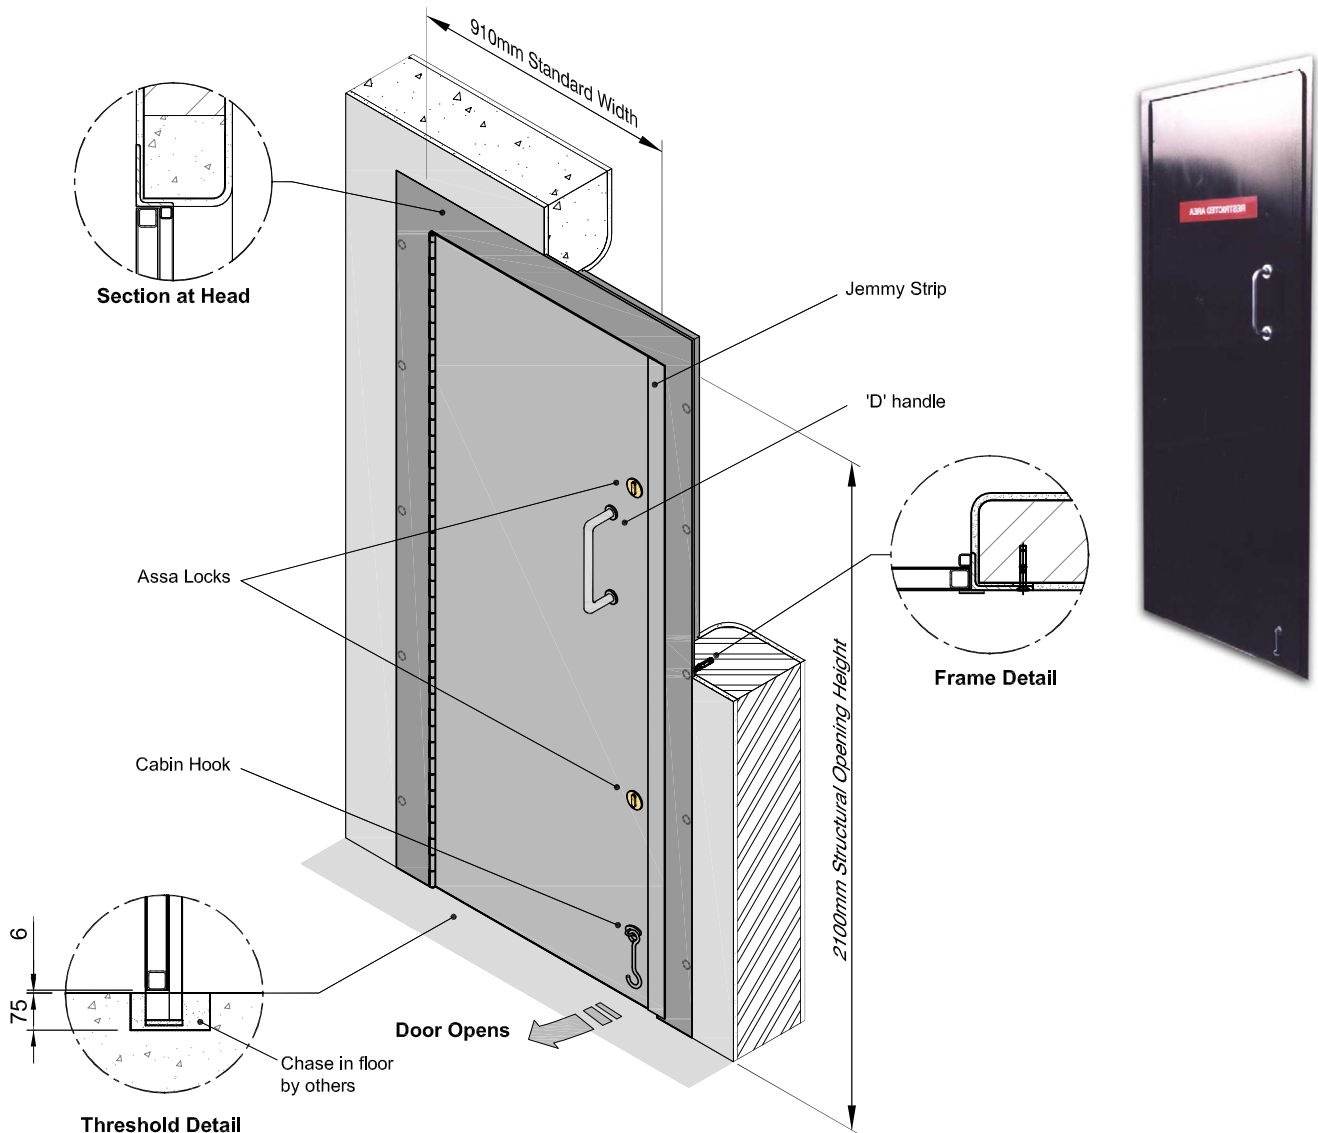

### Specification


- Door leaf constructed from 40mm rolled hollow framework sheeted both sides with 3mm thick steel skins.
- Mineral wool insulation to all internal voids.
- 125mm x 75mm x 8mm rolled steel angle frame.
- Frame fixings to suit a variety of opening constructions.
- Door leaf mounted within door frame and hung on a substantial continuous hinge.
- Supplied with two ASSA deadlocks suited to differ.
- Fitted with one 'D' handle on outside, one cabin hook, one heavy duty barrel bolt on inside.
- Security strip on leading edge to resist forced entry.

### Finish

- One coat factory applied high build zinc phosphate primer.

### Options

- Rolled steel angle frame or profile frame to suit site conditions.
- Can be supplied with a Frazer Bar (free issue from the MOD) instead of the ASSA locks when used as an MOD emergency escape door.

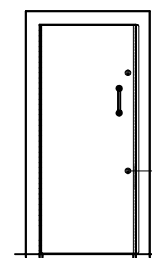

CSL0310