
CSL0404



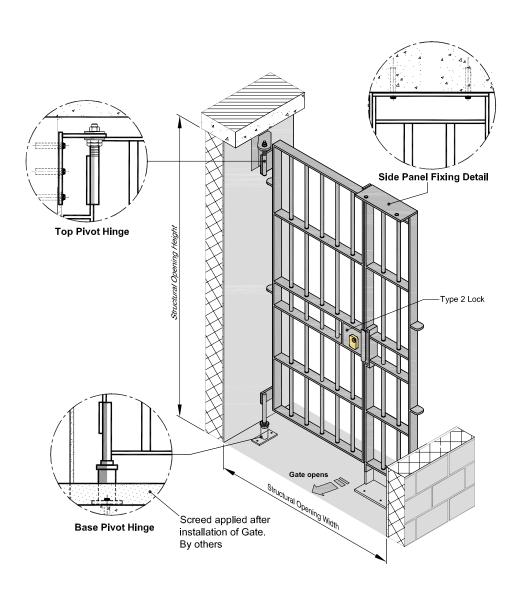

Specification

- Gate is constructed from 65mm x 12mm flat steel framework with 30mm diameter solid vertical bars.
- Mounted on Home Office pattern pivot hinges.
- Frame fixings to suit a variety of opening construction.
- Home Office Type 2 heavy duty mortice deadlock. (Except when gate used in Prisons or Crown Courts where the lock is supplied and installed by HMPS).

Finish

One coat factory applied high build zinc phosphate primer.

Options

- Any arrangement of side or header panels can be provided.
- 12V DC electric strike.
- Hydraulic door Closer.
- Double leaf gate with joggle bolts.
- Galvanized finish.

