
SECTION 4

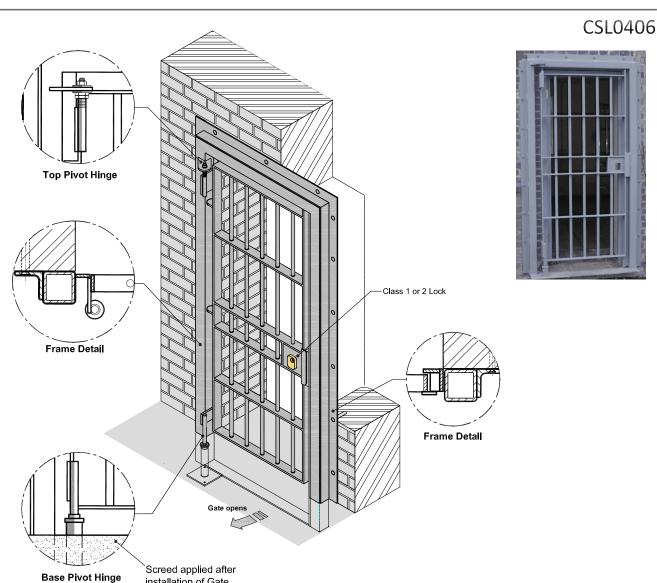

Specification

- Gate is constructed from 65mm x 12mm flat steel framework with 30mm diameter solid vertical bars.
- Mounted on Home Office pattern pivot hinges.
- The Gate is mounted within a RHS and RSA frame and is fixed by chemical resin anchors.

installation of Gate. By others

• Preparation for a Home Office Class 1 or 2 heavy duty mortice deadlock supplied and fitted by HMPS.

Finish

One coat factory applied high build zinc phosphate primer.

Options

Galvanized finish.

