
CSL0408

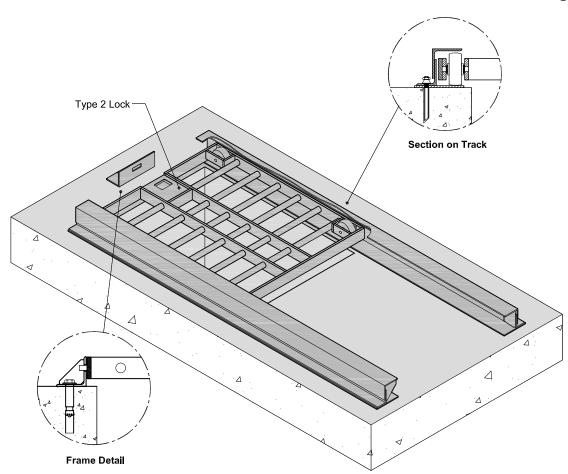

Specification

- Gate is constructed from 65mm x 12mm flat steel framework with 30mm diameter solid bars.
- Track constructed from 90 x 90 x 6 RSA, 80 x 60 x 6 RSA and 150 x 6 flat.
- The gate slides on 4 no 100 dia cast iron wheels on tracks and is fixed by chemical resin anchors.
- Preparation for a Home Office type 2 heavy duty mortice deadlock supplied and fitted by HMPS.

Finish

• One coat factory applied high build zinc phosphate primer.

Options

• Galvanized finish.

