SECTION 5

# CSL0505

# Purpose

A cell bench top for use as a new or replacement to an existing bench top.


# Specification


- Bench top is constructed from either 45mm thick Iroko hardwood battens or from Corian solid surface material bonded to plywood sheet to give a finished thickness of 38mm.
- Steel supports are constructed from 76mm x 38mm rolled steel channels, with fully welded fixings lugs at face and rear.

### Finish

- Timber bench top, two coats of water borne varnish.
- Corian in white. Other colours available.
- Steelwork has one coat factory applied high build zinc phosphate primer.

## Options





- Ash or Maple battens can be supplied.
- Corian supplied from a range of standard colours.
- Bench can be supplied any length.
- 500mm wide bench for use in Magistrates Courts.

# CSL0506

# Crown Court Cell Bench

# Purpose

A cell bench complying with the specification of the Court Standard and meeting the criteria for maintaining a safe, secure and functional cell bench seat within the environment of an HM Crown Court designated cell unit.

# Specification


- Bench top and backrest are constructed from 45mm thick Iroko hardwood battens.
- Supporting steel underframe is constructed from rolled steel angle legs with fully welded fixing lugs at face and rear.

#### Finish

- Timber bench top, two coats of water borne varnish.
- Steelwork has one coat factory applied high build zinc phosphate primer.

#### Options

- Ash or Maple battens can be supplied.
- Corian top.
- Bench can be supplied any length.

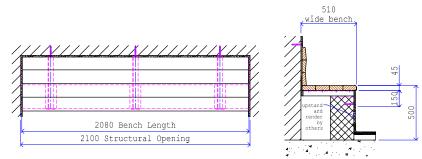

# SECTION 5

90